



BY APPOINTMENT TO H.M. THE QUEEN  
MANUFACTURERS OF FLOORCOVERING  
FORBO FLOORING UK LTD. KIRKCALDY

allura® click Flexcore  
**MORE FLEX**  
**LESS RIGID**

[www.forbo-flooring.co.uk/alluraclickFlexCore](http://www.forbo-flooring.co.uk/alluraclickFlexCore)

creating better environments

**forbo**  
FLOORING SYSTEMS




## QUIET, DURABLE, SUSTAINABLE: DISCOVER ALLURA CLICK FLEXCORE

Allura click FlexCore combines the best of luxury vinyl tiles with a flexible core, making it perfect for both new builds and renovations. Featuring Forbo's easy click system, integrated 20 dB acoustic backing, and a flexible core, it requires no adhesive and can be installed on uneven subfloors. Its flexibility allows it to bridge gaps and irregularities, while being easy to cut by hand with a knife.

Designed for durability, Allura click FlexCore can be installed in direct sunlight and covers areas up to 1000m<sup>2</sup> without the need for expansion joints, making it ideal for high-traffic spaces. The innovative design provides a 20 dB impact sound reduction, ensuring a quieter environment.

Sustainability is at the core of Allura click FlexCore. Made from 100% PVC and containing 52% recycled content by weight, this flooring is fully recyclable. It's also an adhesive-free solution, allowing planks to be easily removed and reused, extending the product's lifecycle.

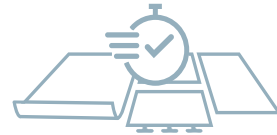

### Fast Flooring

The built in underlay and easy click system in a flexible and easy to handle product that can be cut by hand ensures a fast and easy installation without the use of adhesives.



### Acoustic performance

Allura click FlexCore guarantees a consistent 20 dB acoustic rating and is more quiet underfoot than alternatives.



### Easier renovation

No subfloor preparation under most demanding circumstances thanks to the flexible core that handles imperfections easily and for the lifetime of the product.



### Circular

Made from 100% PVC, Allura click FlexCore is fully recyclable and reusable. Containing 52% recycled content from internal and external waste streams.



Watch the Allura  
click FlexCore video



Learn more about  
the collection

## ALLURA CLICK FLEXCORE vs TRADITIONAL RIGID CORE PRODUCTS



**Both vinyl floors are completely waterproof, offer maximum stability and durability, and are easy to install with a click-lock system without the use of adhesives.**

However, Allura click FlexCore offers **more benefits** than rigid core vinyl floors:

- Contains **52% recycled content** from internal and external waste streams
- No acoustic underlay required because of the **20 dB built-in underlay**
- Can be **installed over subfloor height differences and in direct sunlight without shrinkage**
- All layers are **100% PVC for easy recycling**
- Flexible construction makes it **very easy to cut by hand with a knife**
- **Lighter to handle** than traditional rigid core LVT floors



## EASY INSTALLATION FOR EVERY PROJECT


Thanks to the double glass fleece, providing excellent dimensional stability, in many cases there is no need for a subfloor treatment.

Allura click FlexCore can handle joints up to 8mm wide and 3mm deep, with maximum height differences of 2mm between adjacent tiles.

The flooring can even be installed over level expansion joints or cracks in the subfloor up to 10mm wide. Installation without expansion joints is possible over areas up to 1000m<sup>2</sup>.

Allura click FlexCore LVT can be installed in areas with significant direct sunlight, without the risk of shrinkage. It is lighter than traditional rigid core LVT floors, making it easier to transport and handle. Its flexibility, also makes it easier to cut with a knife compared to rigid core LVT floors.

### Maximum height differences of 2mm between adjacent tiles

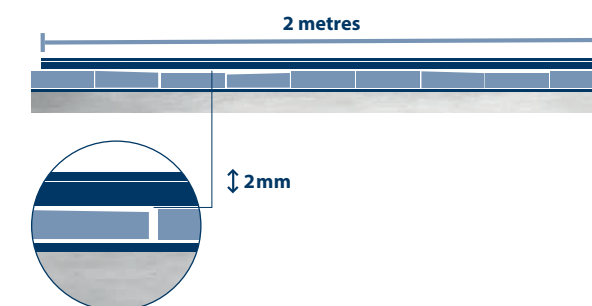


### Installation in direct sunlight without shrinkage




### Can be installed over grouts up to 8mm wide and 3mm deep



VS.



### Expansion joints in subfloor maximum 10mm wide

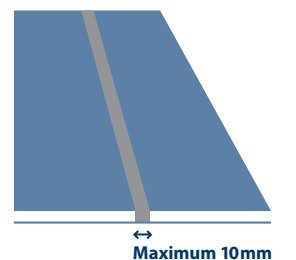



63643CF5 | natural serene oak

| Click FlexCore       |              |                             |
|----------------------|--------------|-----------------------------|
| Total thickness      | EN-ISO 24346 | 6.3 mm                      |
| Wear layer thickness | EN-ISO 24340 | 0.55 mm                     |
| Domestic use         | EN-ISO 10874 | Class 23                    |
| Commercial use       | EN-ISO 10874 | Class 33                    |
| Light industrial use | EN-ISO 10874 | Class 42                    |
| CE                   | EN 14041     |                             |
| UK                   | BS EN 14041  |                             |
| Reaction to fire     | EN 13501-1   | B <sub>fl</sub> -s1, L, NCS |
| Thermal conductivity | EN 12524     | 0.25 W/mK                   |

THE SYMBOLS AND ABBREVIATIONS  
UNDER THE SAMPLES EXPLAINED:

4 sides bevelled

natural colour variation

in register embossing

20 dB sound reduction

LRV 27

LRV 29

LRV 40

LRV 22

light giant oak  
60288CF5 | 150.5 x 23.7 cm

natural giant oak  
60284CF5 | 150.5 x 23.7 cm

white autumn oak  
60350CF5 | 121.2 x 18.7 cm

grey autumn oak  
60356CF5 | 121.2 x 18.7 cm

LRV 45

LRV 27

LRV 37

LRV 21

light serene oak  
63641CF5 | 150.5 x 23.7 cm


natural serene oak  
63643CF5 | 150.5 x 23.7 cm

light honey oak  
60305CF5 | 150.5 x 23.7 cm

central oak  
60300CF5 | 150.5 x 23.7 cm





63535CF5 | natural timber

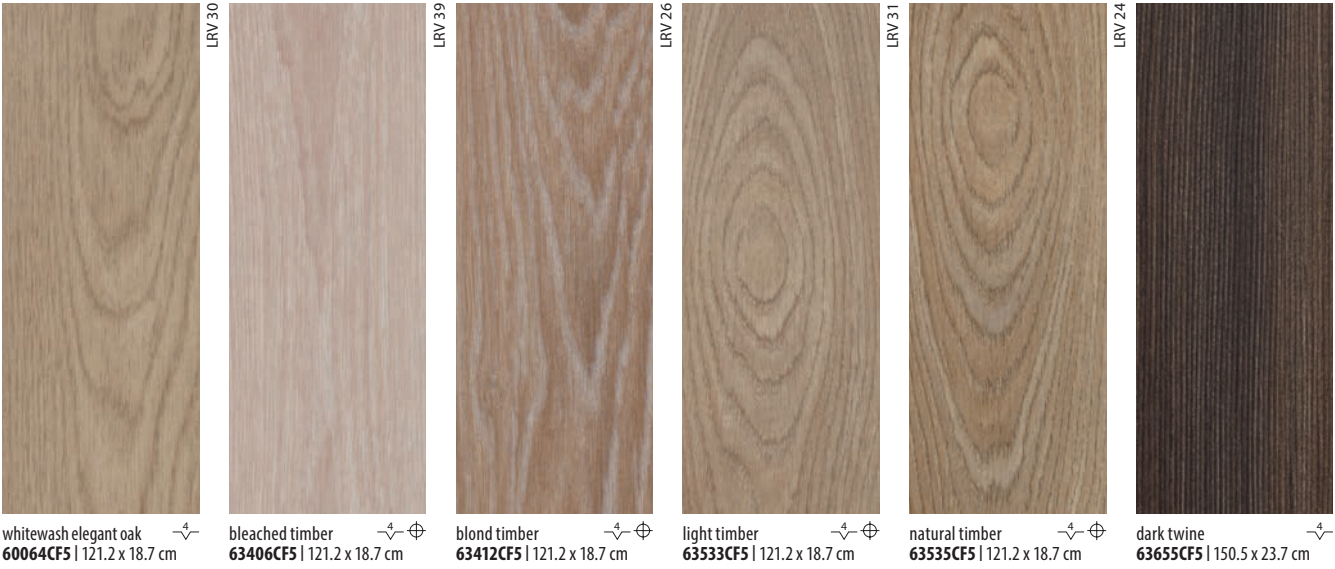

| Click FlexCore       |              |                             |
|----------------------|--------------|-----------------------------|
| Total thickness      | EN-ISO 24346 | 6.3 mm                      |
| Wear layer thickness | EN-ISO 24340 | 0.55 mm                     |
| Domestic use         | EN-ISO 10874 | Class 23                    |
| Commercial use       | EN-ISO 10874 | Class 33                    |
| Light industrial use | EN-ISO 10874 | Class 42                    |
| CE                   | EN 14041     |                             |
| UK                   | BS EN 14041  |                             |
| Reaction to fire     | EN 13501-1   | B <sub>fl</sub> -s1, L, NCS |
| Thermal conductivity | EN 12524     | 0.25 W/mK                   |

THE SYMBOLS AND ABBREVIATIONS  
UNDER THE SAMPLES EXPLAINED:

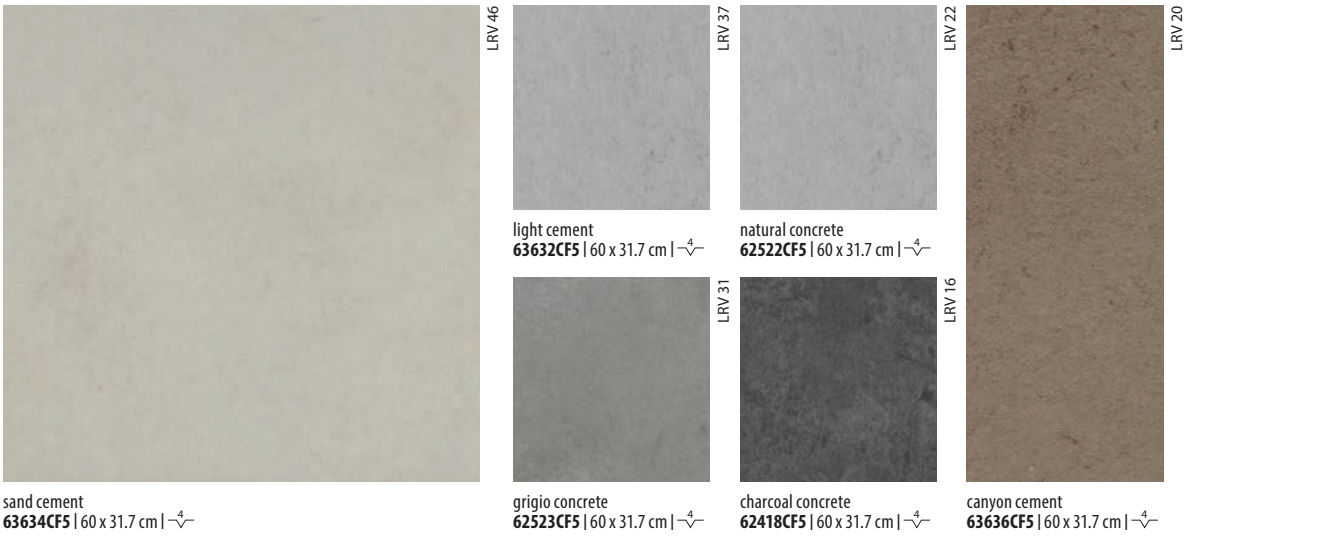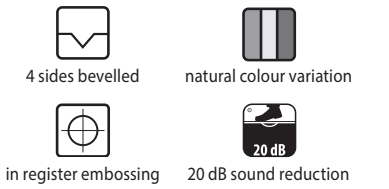



Forbo Flooring Systems is part of the Forbo Group, a global leader in flooring and movement systems, and offers a full range of flooring products for commercial and affordable housing and new build markets. High quality linoleum, vinyl, textile, flocked and entrance flooring products combine functionality, colour and design, offering total flooring solutions for any environment.



#### Increase your product guarantee

Combine any Forbo interior product with Coral and/or Nuway to increase their guarantee by +5 years.

More info visit [www.forbo-flooring.co.uk/efsguarantee](http://www.forbo-flooring.co.uk/efsguarantee)

#### UK

Forbo Flooring UK Limited  
High Holborn Road  
Ripley  
Derbyshire DE5 3NT

#### London EC1 showroom

79 St John Street, Clerkenwell  
London EC1M 4NR  
Tel: 0207 553 9300

#### For commercial enquiries:

If calling from the North,  
London & South East  
Tel: 0800 0282 162  
[bcs.flooring.uk@forbo.com](mailto:bcs.flooring.uk@forbo.com)

If calling from Scotland,  
Midlands & South West  
Tel: 0800 0935 258  
[kcs.flooring.uk@forbo.com](mailto:kcs.flooring.uk@forbo.com)

#### Nuway enquiries:

Tel: 01773 740 688  
[efs.flooring.uk@forbo.com](mailto:efs.flooring.uk@forbo.com)

#### Residential enquiries:

Tel: 0800 0935 846  
[krcs.flooring.uk@forbo.com](mailto:krcs.flooring.uk@forbo.com)  
[www.forbo-flooring.co.uk](http://www.forbo-flooring.co.uk)

#### Sample orders:

Tel: 0800 731 2369  
Fax: 0843 319 1831  
[samples.uk@forbo.com](mailto:samples.uk@forbo.com)

#### Ireland

Forbo Ireland Ltd  
2 Deansgrange Business Park  
Blackrock  
Co Dublin

Tel: 00353 1 2898 898  
[info.ireland@forbo.com](mailto:info.ireland@forbo.com)  
[www.forbo-flooring.ie](http://www.forbo-flooring.ie)

#### Registered office:

Forbo Flooring UK Limited  
High Holborn Road  
Ripley  
Derbyshire DE5 3NT  
Registered in England 9200318



Manufacturing Partner



#### Find us on

