

creating better environments

Podbo

FLOORING SYSTEMS




marmoleum[®]

WELL-BEING STARTS HERE


In a world where we spend approximately 85% of our time indoors, it's only natural to prioritise enhancing the quality of these spaces. Whether it's schools, healthcare facilities, workplaces, leisure centres, or our homes, every square meter provides an opportunity to infuse the best elements of nature into our indoor surroundings. That's why we've made it our mission to design and offer flooring solutions that have a positive impact on individual health and comfort. Seamlessly integrating nature into our indoor spaces and forging a harmonious connection with the natural world.

Marmoleum plays a significant role in enhancing the well-being of everyone it touches. From the utilisation of natural raw materials to the spectrum of colours we offer, Marmoleum engages all your senses. Its tactile qualities and stunning colour palette provide a sensory experience that brings a touch of nature into our daily lives while reinforcing our profound connection to the environment.









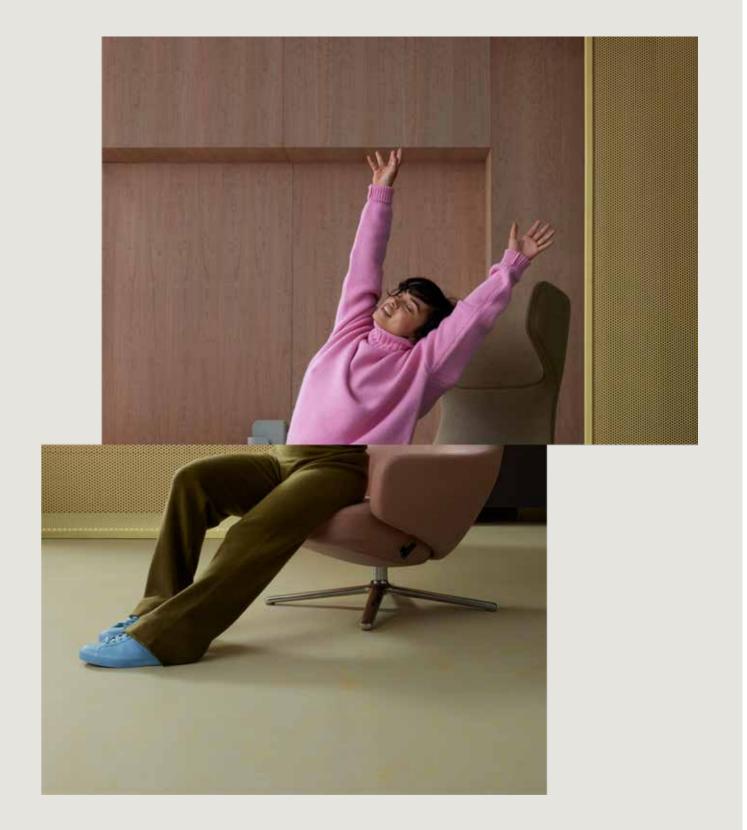


BRINGING THE OUTDOORS IN


Bringing nature inside immediately contributes to our health and comfort, creating a seamless connection between our living spaces and our well-being. Marmoleum provides this touch of nature in our daily lives, whether at work, rest or play, reinforcing our connection with our natural environment.

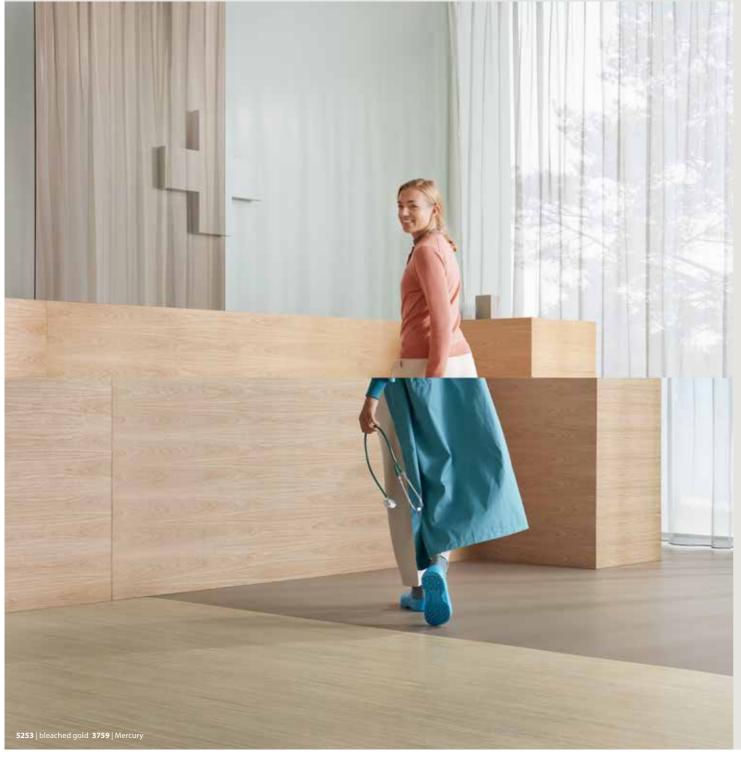

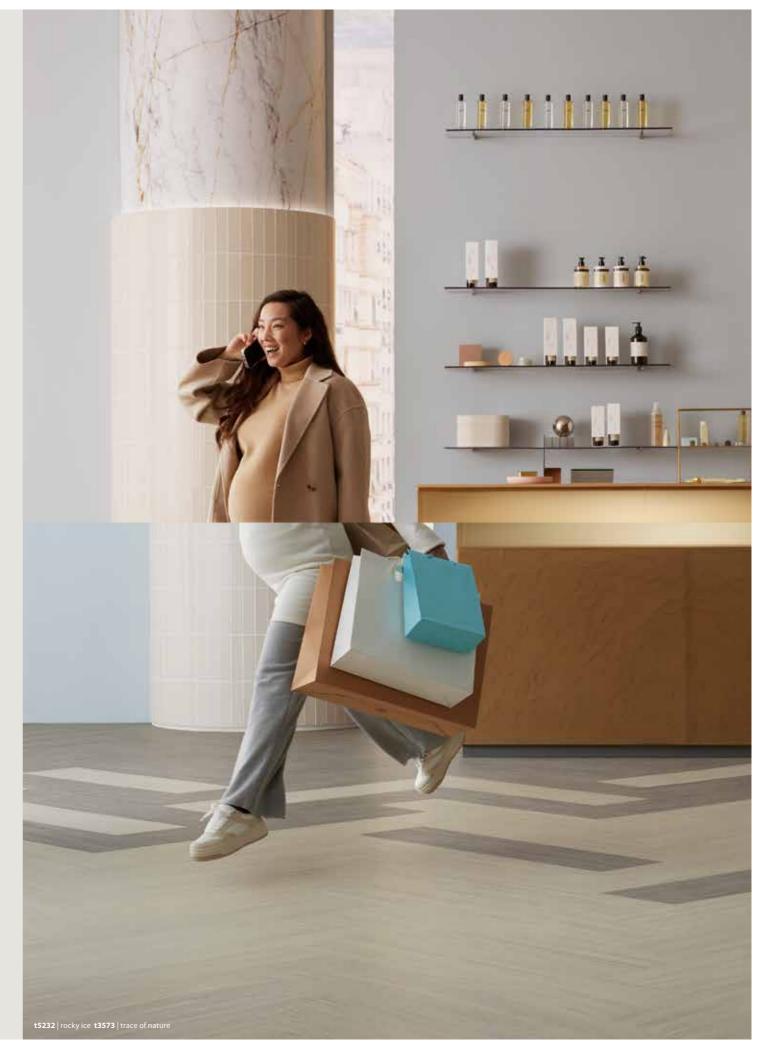

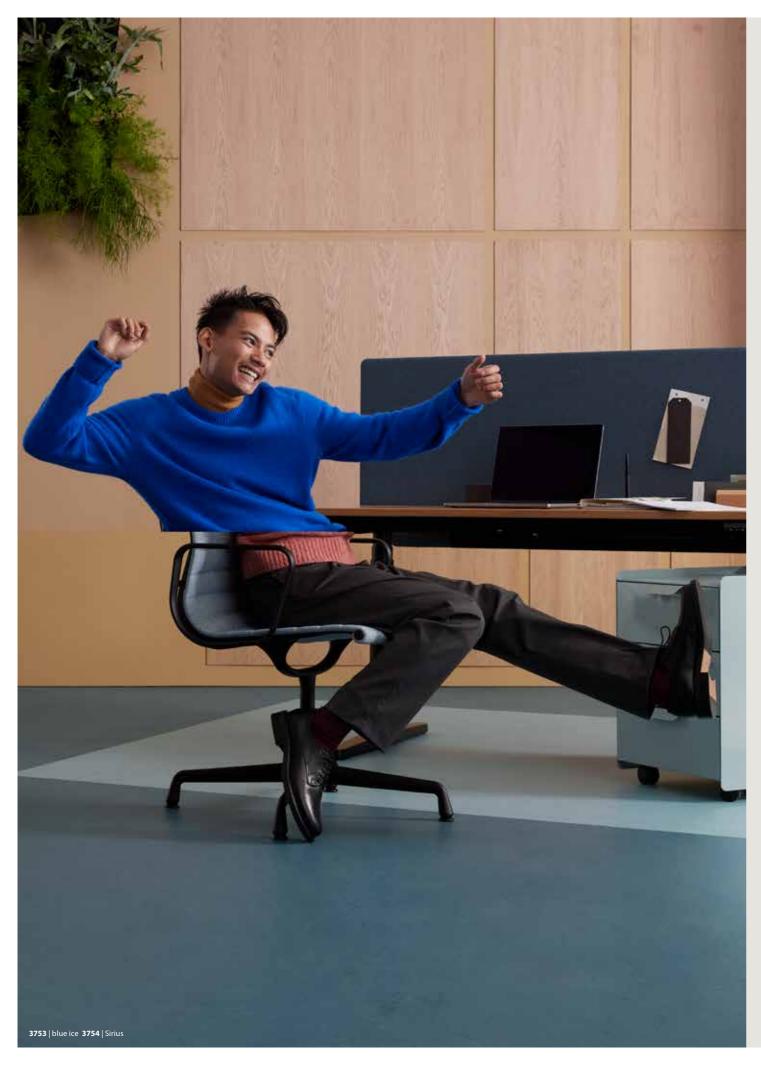




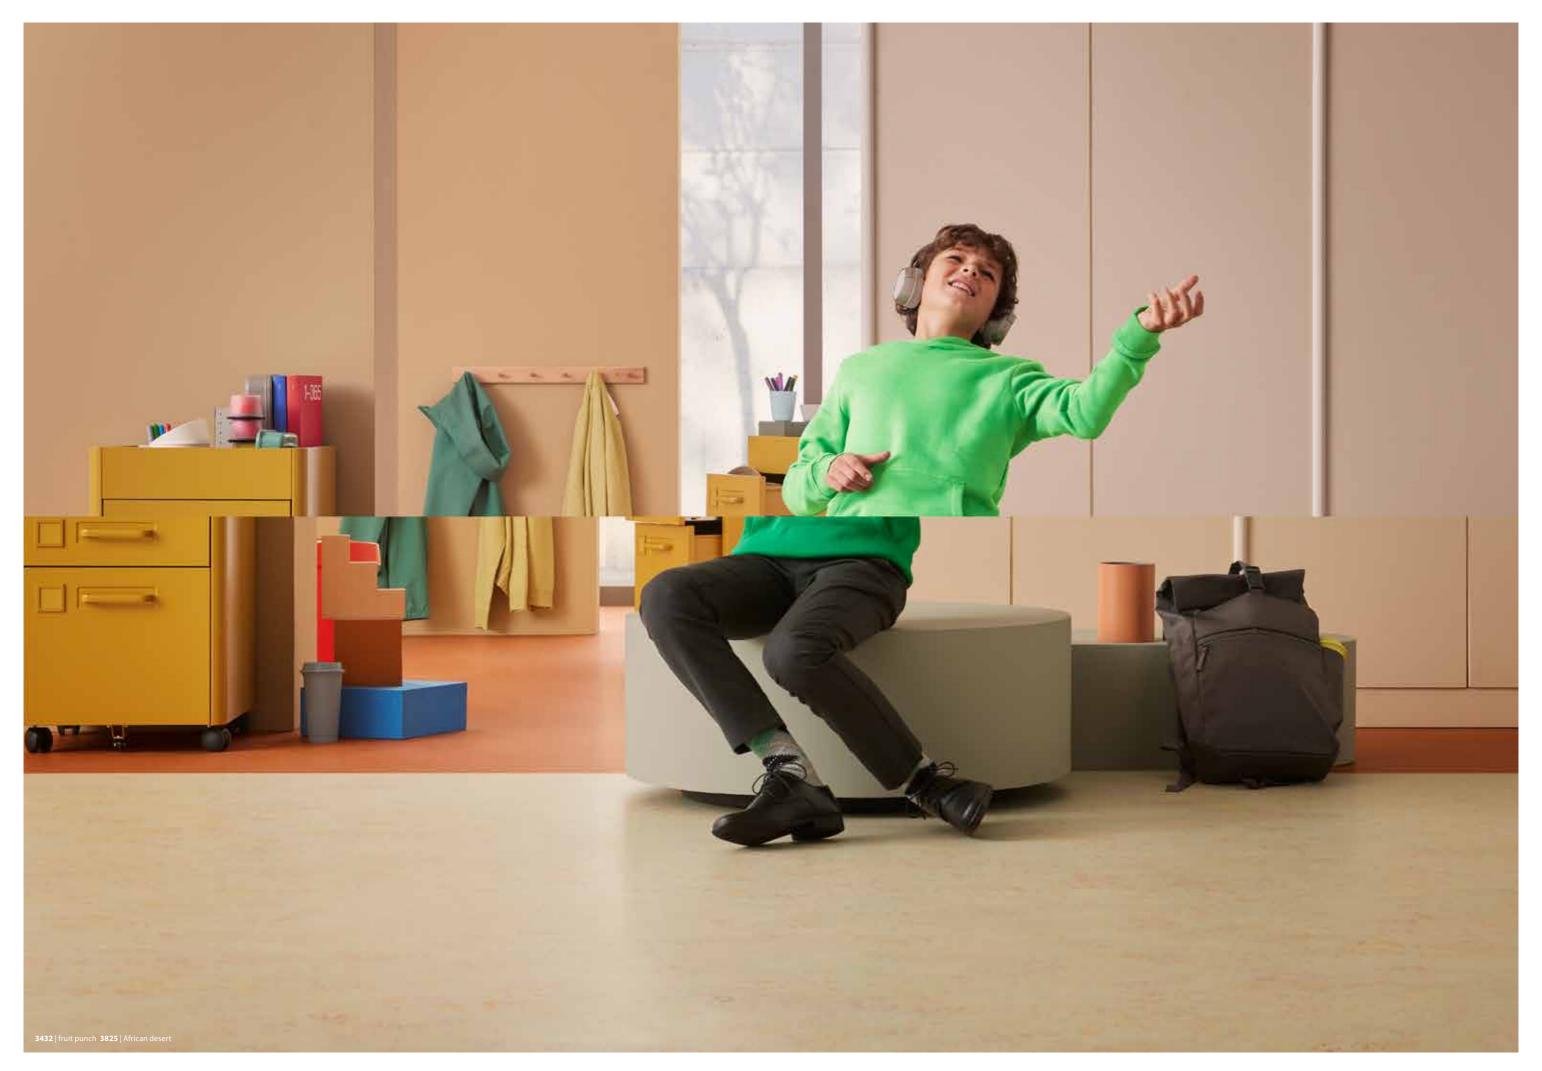



RECYCLING PROGRAM

www.forbo-flooring.co.uk/sustainability



Circular ready

With the planet's resources vanishing quickly, it is of ever-growing importance to ensure a circular economy, where products are developed and manufactured to be recycled and reused for a new life and at the same time prevent and sequester carbon emissions.

Marmoleum is the perfect choice for those looking for a flooring option that is both beautiful and environmentally friendly.




Circular ready, reduced carbon footprint and increasing the use of post-consumer recycled content, Marmoleum can be used over and over again.



Long lasting and highly durable thanks to the Topshield pro surface finish, the longer the floor can be used, the more circular it is.



Climate positive, cradle to gate, without offsetting. Produced with 100% green electricity.

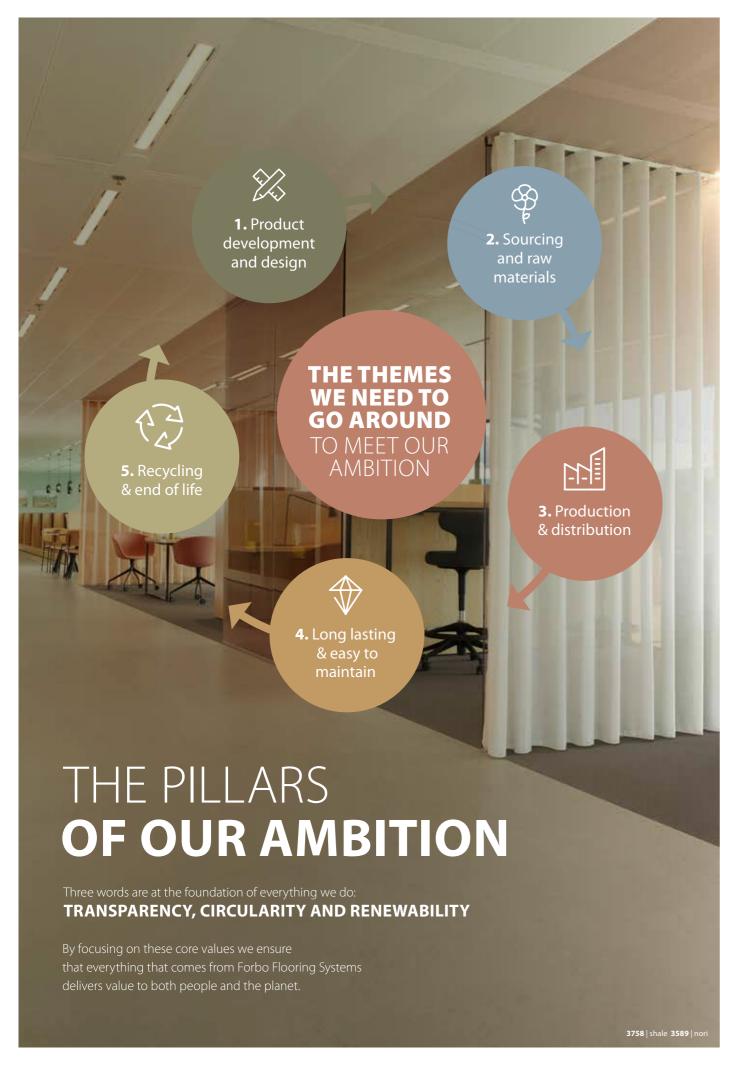

PRODUCT DEVELOPMENT & DESIGN

- Marmoleum is designed to go round, it contains recycled content from end-of-life, post installation, cross-industry and closed loop waste streams.
- Timeless design that fits everywhere for everyone, the floor doesn't get outdated.
- Net Fit installation lowering total footprint.

SOURCING & RAW MATERIALS

- Made of up to 98% natural and renewable raw materials.
- All raw materials are obtained following the ethical and sustainable SA8000 and ISO 14001 certification.
- Naturally plastic-free and phthalate-free flooring.

PRODUCTION AND DISTRIBUTION

- Climate positive, cradle to gate, without the need for offsetting, based on our EPD Marmoleum 2.5mm sheet.
- 100% green electricity.

LONG LASTING & EASY TO MAINTAIN

- Marmoleum is highly durable, and is designed with circularity in mind.
- The Topshield pro finish makes Marmoleum easy to clean, hard-wearing and resistant to stains.
- Marmoleum is fit for purpose, for many applications, with no wax or polish.

RECYCLING AND END-OF-LIFE

- Marmoleum is designed with circularity at its core which allows us to recycle end of life material back into new flooring.
 A closed loop vision is now a reality.
- Of the total recycled content there is always 33% recycled pre-and/or post-consumer flooring waste.
- We've created a fully safe end-of life recycling process with traceable uplifted Marmoleum flooring.
- Every m² saved from incineration after fulfilling its intended purpose, saves emissions to the equivalent of 1.8 kg CO₂.



marmoleum[®]

FORBO'S LINOLEUM BRAND

The Marmoleum collections provide the largest colour palette in resilient flooring, a beautiful array of structures and designs that connects the colours of indoor spaces. Made from natural raw materials Marmoleum is the most sustainable resilient floor around.

marmoleum[®] solid

The four individual finishes provide the foundation for creating pure, distinctive and modern spaces. The Solid collection combines contemporary styling with a versatility that enables designers to design an elegant, natural backdrop to any interior.



marmoleum[®] marbled

Taking inspiration from the natural world, and offering a spectrum of over 90 colours across the Fresco, Real, Terra, Vivace and Splash ranges, the Marmoleum Marbled collection combines both subtle and striking marbled effects to create a range that provides the perfect backdrop for any commercial interior.



marmoleum® linear

This Linear collection offers a relevant, functional and desirable range that allows you to create comfortable spaces with a natural touch where you truly feel at home. The directional Linear pattern can be used to create a floor that guides people from one space to another, and to indicate an area within a larger space.



marmoleum[®] modular

Comprising 6 distinct design ranges – Lines, Textura, Slate, Shade, Marble and Colour, the Marmoleum Modular collection offers 100 x 25cm planks and 50 x 25cm and 50 x 50cm tiles to allow complete design freedom.



marmoleum[®] click

Our Marmoleum Click panels are very durable and simple to care for. The smooth surface is easy to clean while its beautiful colours won't fade over time. Marmoleum Click is available in 23 colours and 3 panel sizes, which offers great design opportunities to create your own unique floor.



furniture linoleum

Furniture Linoleum is a decorative surfacing material that can be applied to vertical, horizontal and curved surfaces, providing interior furniture with a truly distinctive and individual look.



bulletin board®

Pinboard linoleum, or Bulletin Board, offers a practical, simple solution to collect and exchange thoughts and ideas wherever people plan, create and meet. Simply share your thoughts by pinning your idea onto the wall.



SPECIAL FLOORING SOLUTIONS

(special acoustic and static disapative varieties)

In addition to our standard ranges, we also offer a number of linoleum floor coverings developed to meet specific technical or comfort requirements, including static control and sound reduction.





marmoleum® solid CONNECT WITH MODERN NATURE

Discover a harmonious connection with modern nature through Marmoleum Solid, a climate positive floor covering, cradle to gate, without the need for offsetting. Crafted from natural raw materials, this collection is designed to elevate any space with its refined aesthetics.

The balanced colour palette effortlessly blends with contemporary trends while remaining true to its natural essence. Marmoleum Solid enhances any interior, making the surroundings the hero for many years to come.

The story of nature is in our genes!

Cocoa

A completely new concept in Marmoleum. Upcycled cocoa husks have been added to create a contemporary aesthetic against a refined unicolour background. Cocoa is circular ready, it contains 43% combined recycled content and with this range we aim to maximise the % of end-of-life recycled Marmoleum floors specifically.

Walton

Named after Frederic Walton, the inventor of linoleum, the Walto range is a series of classic and contemporary solid uni colours that present linoleum in its purest form.

Concrete

A true to life series of concrete colours in modern warm and coogrey neutrals. The range is complemented by a series of 'shimme colours that are subtly combined with the grey base.

Piano


a soft, uni colour but with a subtle, soil hiding decoration. The collection offers both neutral as well as accent colours that all combine very well within the range.

marmoleum[®] solid



walton

marmoleum[®] solid marmoleum[®] solid

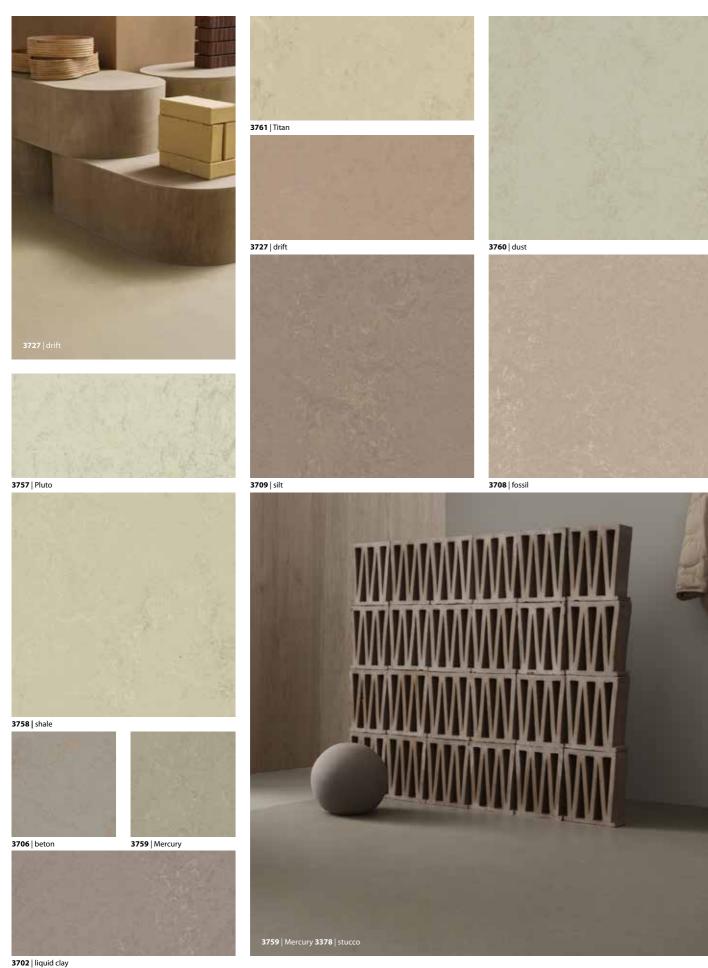



concrete

marmoleum[®] solid



marmoleum[®] marbled DEFINING NATURAL SPACES

The Marmoleum Marbled collection provides the broadest colour range in resilient flooring, a beautiful array of structures and designs that connects the colours of any indoor space in a subtle and sophisticated manner.

There are 5 marbled designs in this collection;

Fresco

A strong palette of tone in tone colours creating a fresh, delicate and balanced aesthetic with a soft contrast and a refined marbled structure.

Real

The 'royal' classic blend of carefully selected colours, developed to create choice and mixes of colour ranging from warm neutrals to calm greys as well as exciting brights and on-trend shades.

Terra

A close and highly contrasting structure inspired by igneous rock types. It creates a sophisticated small scale marble with great soil hiding properties in an authentic colour mix.

Vivace


Marmoleum's liveliest and most outspoken blend made wit six to eight colours to create a chameleon floor that adapts well to a multitude of interiors.

Splash

A modern, playful design which, from a distance, appears a contemporary light grey solid floor with a slight nuance ir tone, yet from up close it reveals surprising colours, offering great combinations of interior elements.



marmoleum® marbled marmoleum® marbled

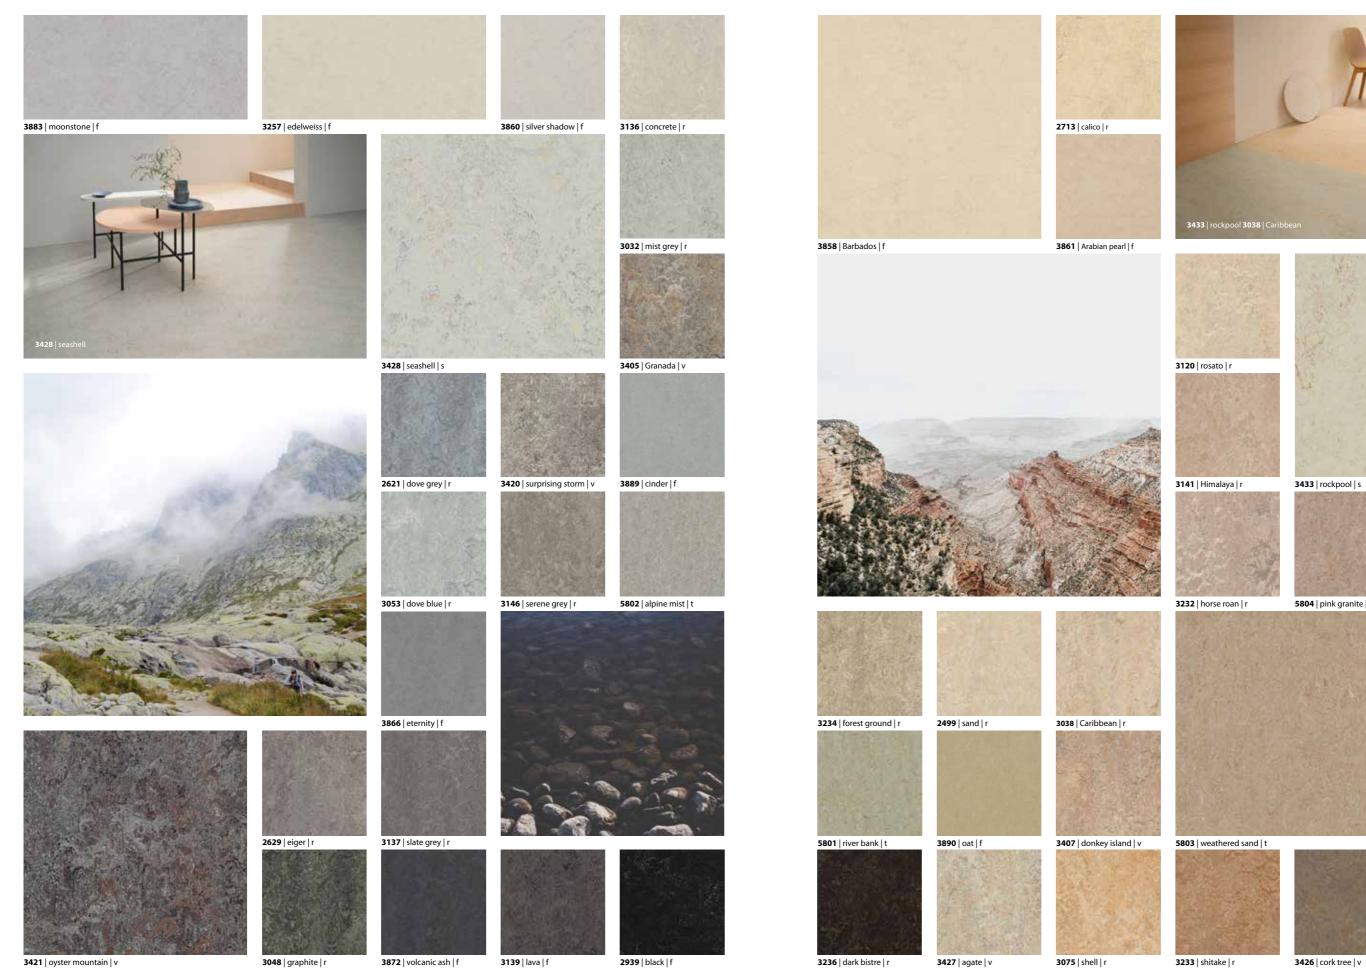

3874 | walnut | f

3252 | sparrow | f

3246 | shrike | f

3254 | clay | f


3433 | rockpool | s

5804 | pink granite | t

marmoleum® marbled marmoleum® marbled





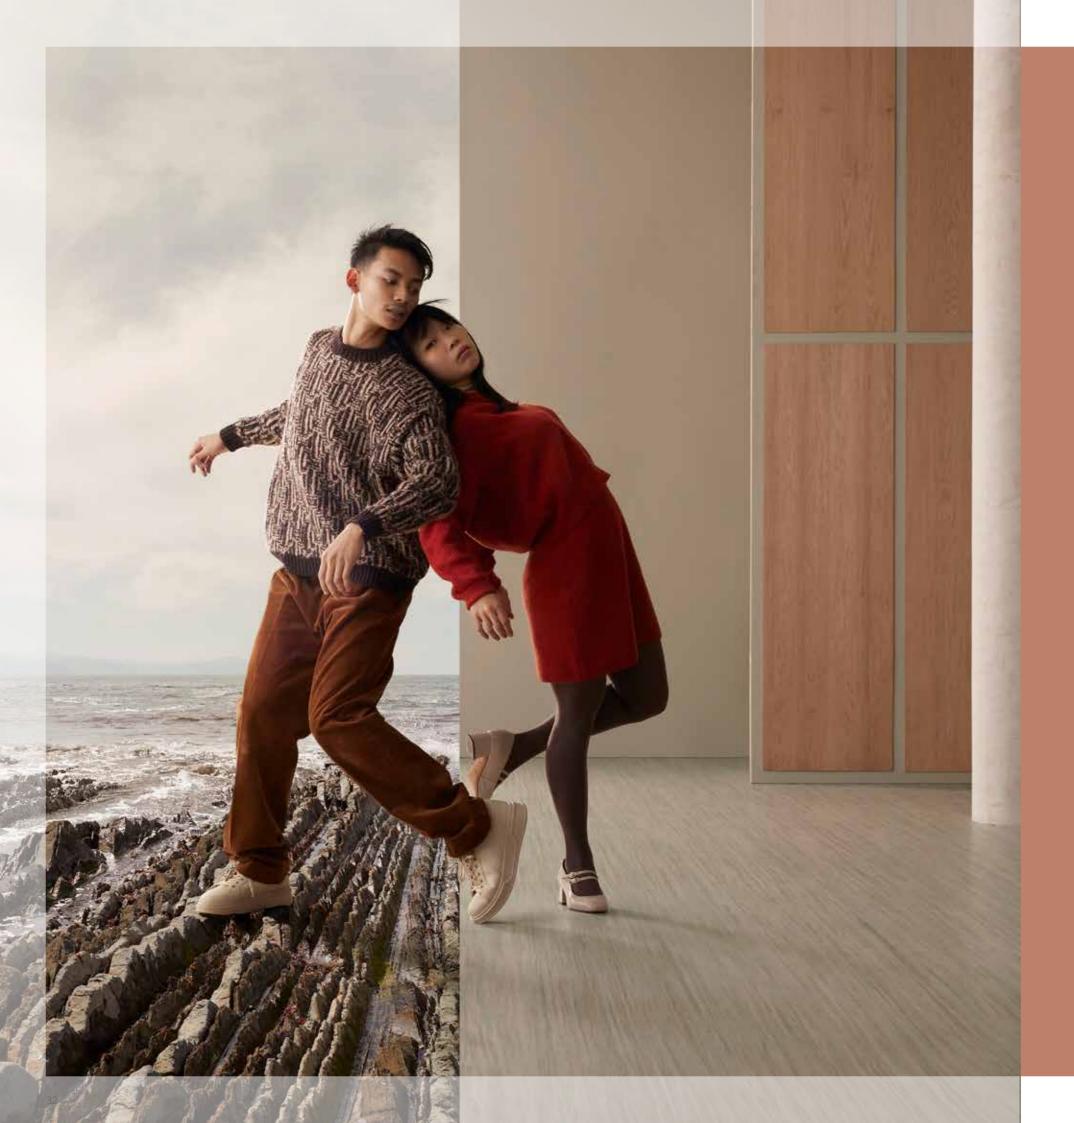


marmoleum® linear CREATING WARM AND WELCOMING SPACES

Marmoleum Linear is designed to create a contemporary, comfortable environment with a feel for informal, natural settings with a homely atmosphere. A setting where we will recover faster, feel encouraged to work, share ideas, and to learn. With an intuitive reference to nature, the Linear collection allows you to create various atmospheres within a space, adjusting to its changing needs. The neutral, rich colours have the ability to easily adapt and come to life when combined with each other and other materials. With Linear, the floor can act as a canvas offering endless possibilities.

Feeling at home anywhere

With this Linear collection, we offer a relevant, functional and desirable range that allows you to create comfortable spaces with a natural touch where you truly feel at home. The directional Linear pattern can be used to create a floor that guides people from one space to another, and to indicate an area within a larger space.

marmoleum[®] linear marmoleum[®] linear

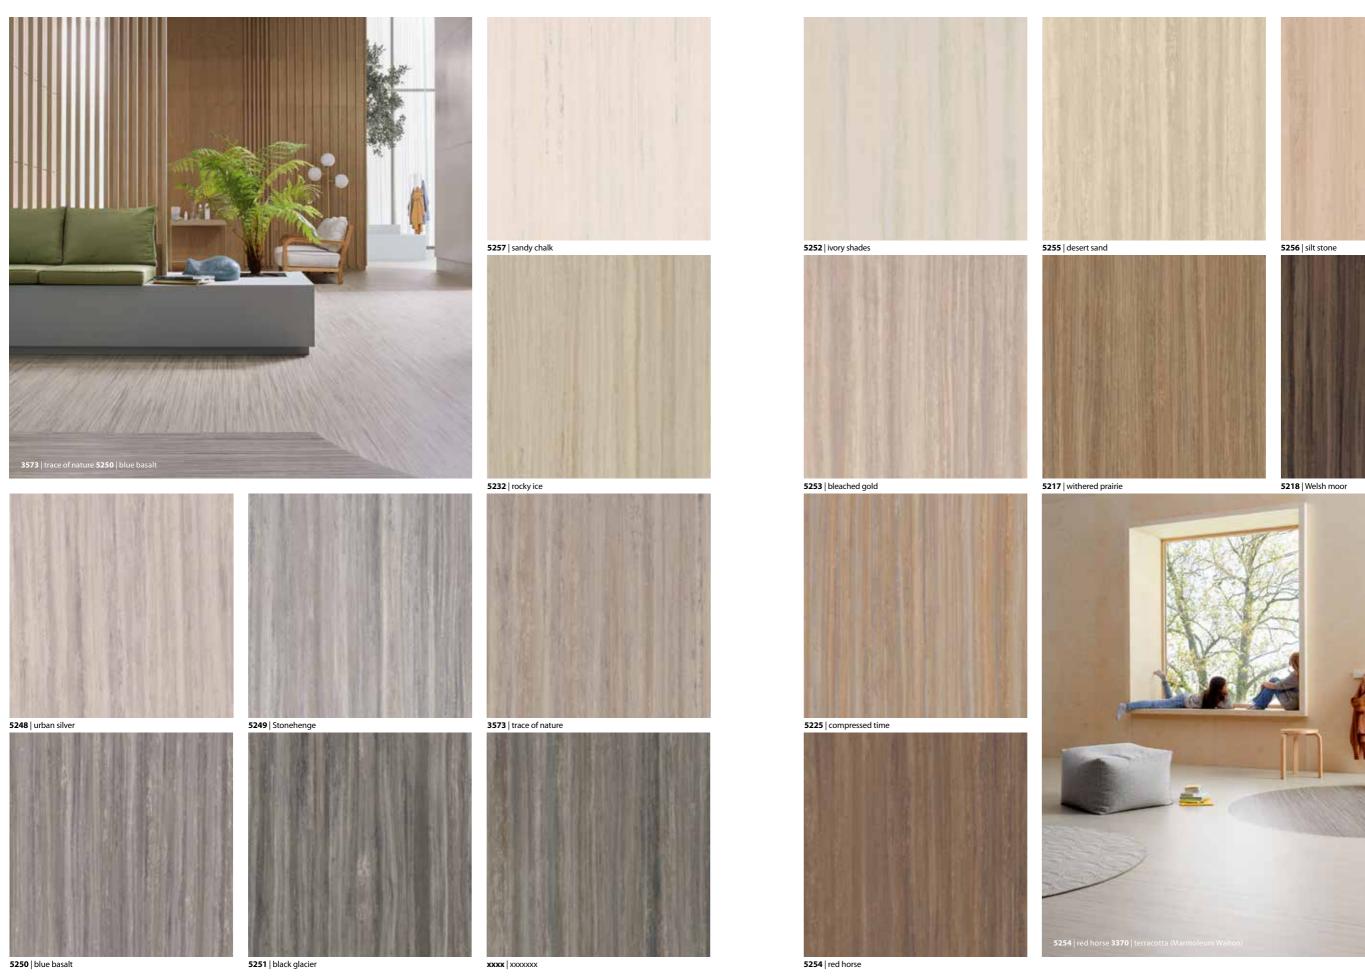

marmoleum® modular CREATE YOUR OWN FLOOR DESIGN

The planks and tiles in this collection are inspired by visuals of wood, concrete, stone and marble with additional accent colours. The designs are featured in a range of colour tones that can be used to mix and match or on their own. The slate and the lines designs in this collection have been awarded both the iF product award as well as the Red Dot design award.

Lines

The colours of natural wood and stone in shades of warm and coon neutrals presented in a range of colour tones that can be used on their own or combined to create a lively harmonious floor pattern of planks of 100x25 cm.

Textura

The Striato Original wood designs have been enhanced with two exclusive embossing structures that follow the wood grain providing the linear design with a sophisticated embossed wood inspired structure. For increased realism, each plank has a unique design.

Slate

Featuring a cool concrete palette with our unique embossing structure, this range offers four natural slate colours in 50x50 cm tiles that come to life on your floor.

Marbled

A contemporary classic design where the colours are created to mix and match, creating subtle nuances in the floor as it is being designed.


Colour

A traditional and classic Marmoleum tile offer which is ideal for use on its own but works equally well when mixed and matched with other ranges of this Marmoleum Modular collection.

Shade

The Shade range represents a series of base colours with a strong monolithic atmosphere.

More information www.forbo-flooring.co.uk/marmoleummodular

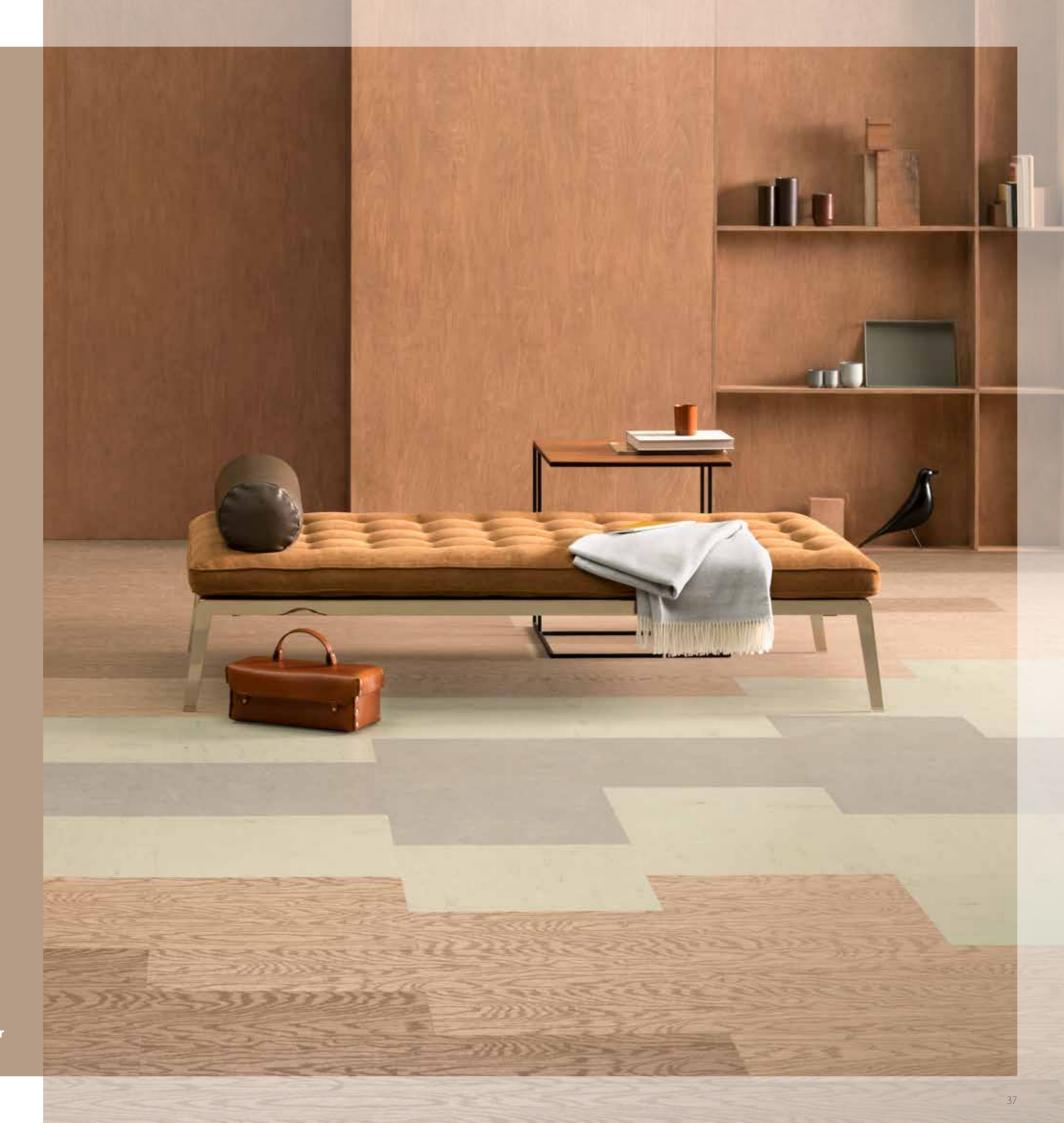


marmoleum[®] modular marmoleum[®] modular










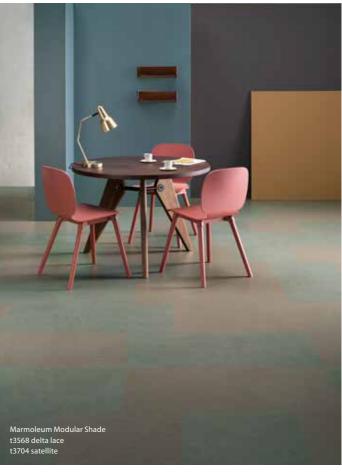

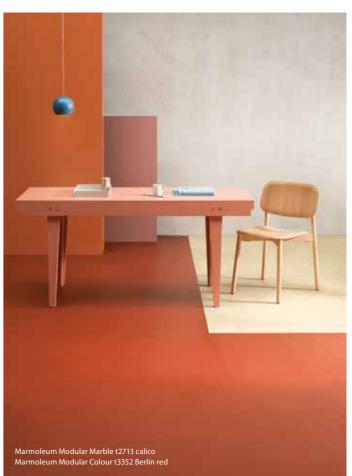



marmoleum[®] click FUN TO DESIGN, EASY TO INSTALL

Marmoleum Click offers a range of easy to install Marmoleum panels. They are made from a high density fibre board and connected with sound absorbing cork backing and a specially developed patented click system for ease of fitting and a seamless finish. This natural Marmoleum floor covering is easy to install and delivers endless design possibilities. Marmoleum Click is available in various plank and tile sizes and a contemporary range of colours. Marmoleum Click can be used in professional environments as well as in the home.

More information www.forbo-flooring.co.uk/marmoleumclick




furniture linoleum LINOLEUM SURFACES

Forbo Furniture Linoleum is the natural and unique surfacing solution for all your interior design applications. Renowned for its elegance and durability, Furniture Linoleum is also a flexible material that doesn't show fingerprints!

It combines a satin matt surface with a warm, fine texture that gives your interior furniture such as tables, desks, doors and cabinets, a truly distinctive, individual look and feel.



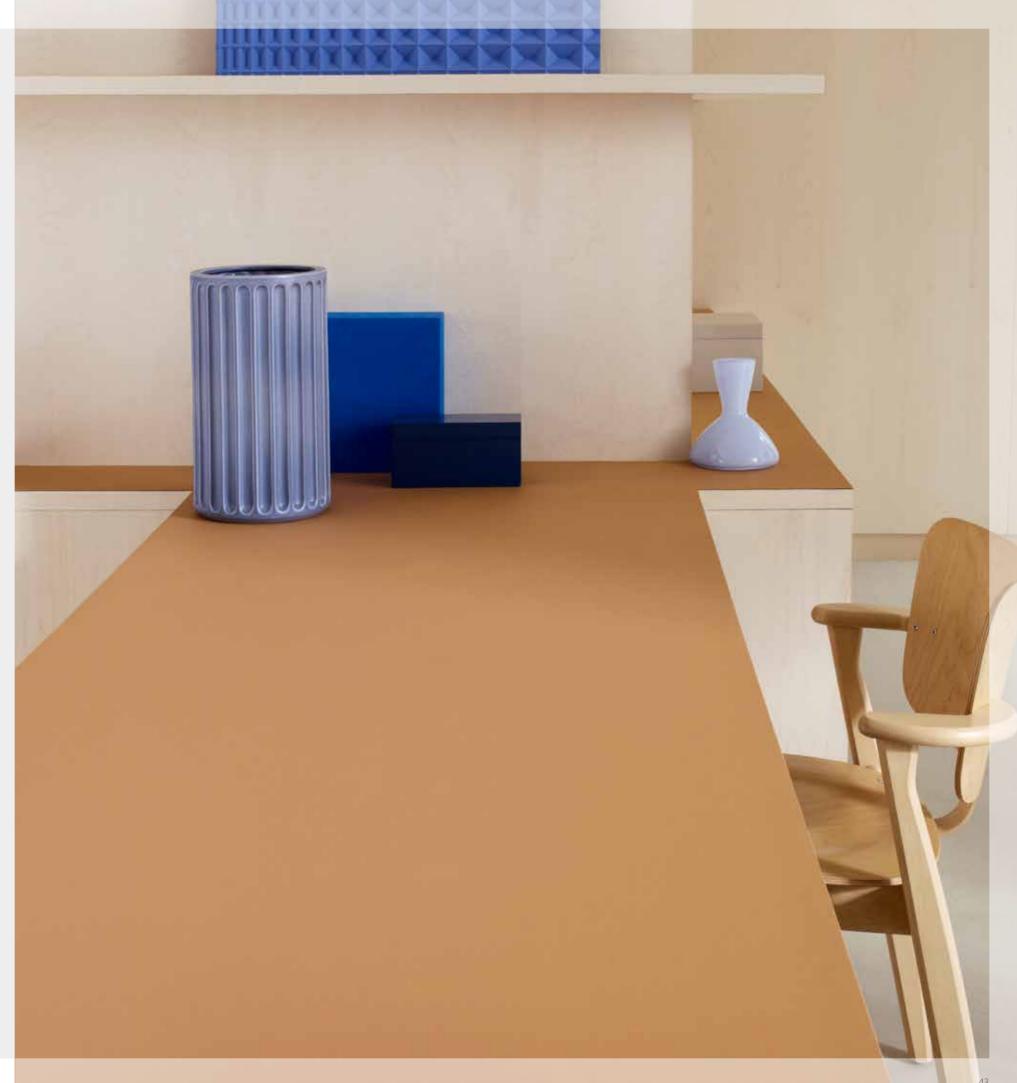

furniture linoleum







EASY TO APPLY

Flexible, organic shapes can be created by Furniture Linoleum as it is naturally flexible. It is supplied in a roll format and can be applied both horizontally and vertically, as well as to curved surfaces.

HYGIENIC & ANTISTATIC

The natural composition and the special surface finish ensure that Furniture Linoleum is naturally antistatic. The surface actively resists the build-up of static charges and prevents dust or dirt from sticking to the surface.

NO MARKS FROM FINGERPRINTS

This natural surface linoleum has an earthy, solid quality to it and has one other unique feature: it doesn't show fingerprints!

SIMPLE ELEGANCE


A number of new fresh and stylish colours have been added to the classic colour range that complement current design trends.

4182 | spring green

4180 | aquavert

4181 | midnight blue

4186 | orange blast

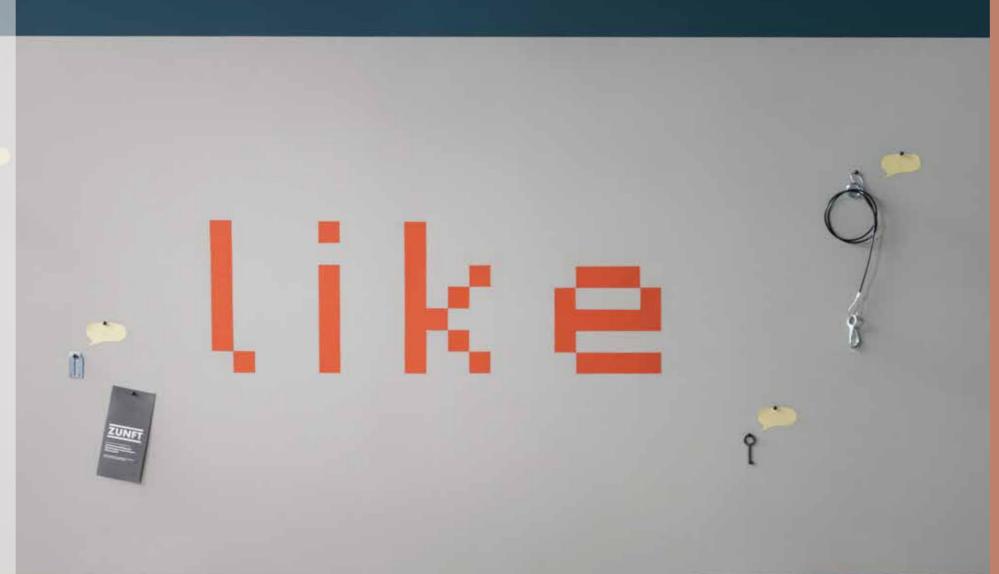

bulletin board® PINBOARD LINOLEUM

From the floor to the wall, Forbo Bulletin Board is a linoleum surfacing material that is ideal for walls and vertical surfaces such as notice or pin boards. It is also a functional sound absorbing aesthetic finish for walls, doors or cabinets and is available in framed formats. Its bacteriostatic properties make it ideal for patient rooms and nurses' quarters.

More information www.forbo-flooring.co.uk/bulletinboard





SPECIAL FLOORING SOLUTIONS

In addition to our regular sheet and tile collections featured in the overview presented in this brochure, Forbo also makes a range of special Marmoleum flooring solutions that each serve a specific purpose or provide a solution to a particular additional functionality. For a complete overview of the colours and items in each of these special ranges please consult the Forbo Flooring Systems websites.



ACOUSTIC SOLUTIONS


The best way to reduce sound is at the source.
That's why acoustic floors are key when it comes to reducing noise in buildings. Our acoustic linoleum floors create a healthy environment by combining sustainability with excellent sound reduction properties.

Marmoleum Acoustic items reduce impact sound by 14dB. The Marmoleum Decibel collection provides the highest impact sound reduction of 18dE There is a range of items from our regular collections availabel as decibel from stock, other colours can be made on request.

ELECTRICAL RESISTANCE

Marmoleum Ohmex is a static dissipative floor covering that meets higher requirements for electrical conductivity. With an electrical resistance of 1-10⁶ < R1 < 1-109 Ohm, conforming to EN 1081, Ohmex ensures personal safety and protects equipment that is sensitive to static discharge. Ideal for computer rooms, server rooms and areas with sensitive equipment. Marmoleum Ohmex is 2.5 mm thick and available in six colours.

Pre-cut panels sized 61x 61 cm of all Marmoleum colours can be made for raised access floor manufacturers. These are available on request and minimum order quantities and lead times apply. Please contact your local sales manager for more information.

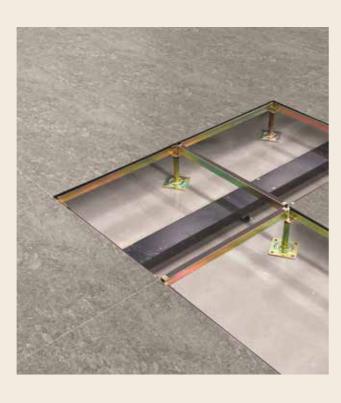



FIRE RESISTANCE

For those areas where extended fire retardancy protection is required, Forbo has developed **2.5 mm Marmoleum FR**. This new variant achieves Bfl -s1, G, CS, according to EN 13501-1. Bfl is an improved flooring fire retardancy classification. All other technical details remain the same as the standard specifications for Marmoleum 2.5 mm

Marmoleum with extended fire retardancy is also classified as a D-s2, d0 wallcovering in accordance with EN 15102. Marmoleum FR is available on request and minimum order quantities and lead times apply. Please contact your local sales manager for more information



MARMOLEUM 3.2

A range of eignt neutral, long lasting Marmoleum Marbled colours in 3.2 mm thickness, is available for those situations in which 3.2 mm is still being specified for its durability, for example on stairs.



DESIGNING WITH MARMOLEUM

Are you looking for something unique on your floor?
Our Aquajet technique allows us to cut the most detailed and beautiful design inlays into your floor. Standard designs are available, however, you can have your own branding or any other design, created especially for your floor.

Decorative flooring can be functional as well as beautiful. Think of routing signs at floor level in hospitals or museums, or zoning to identify different areas of a building. Signs and Symbols help people to find their way around or recognise the purpose of the space they are in. We have created a standard set of signs and symbols for our Marmoleum floors, but feel free to ask us for custom designs.

More information www.forbo-flooring.co.uk/bespokedesign

FLOORING FOR REAL LIFE


Marmoleum with Topshield pro is the ultimate flooring in many ways. The improved surface finish, developed with the latest technologies and based on our years of experience, maintains the appearance of Marmoleum for longer and enables easier cleaning. We can proudly say that Marmoleum is the best natural floor.



WHAT MAKES MARMOLEUM WITH TOPSHIELD PRO 3X BETTER








BEAUTY KEPT FOR LONGER

While Marmoleum with Topshield pro is designed to maintain its appearance, it's important to follow some simple guidelines that will help maintain the beauty of your floor for longer. When you consider all elements of the triangle, Marmoleum with Topshield pro will do the rest

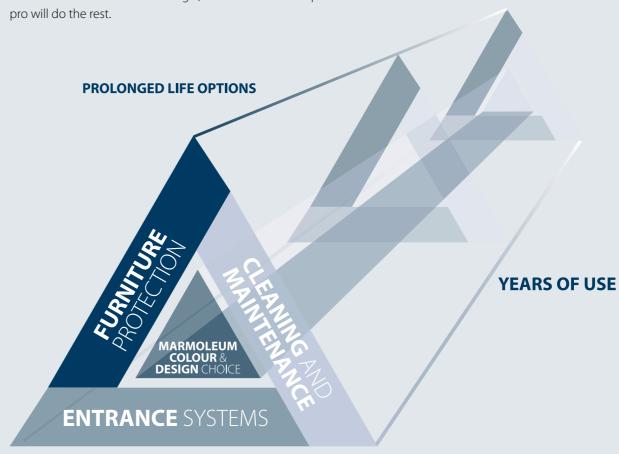









GREAT LOOKING SEAMS

With a professional Marmoleum installation you will have a water-resistant floor – one that can be cleaned with water, even when not welded.

If there is no specific requirement to weld, you can save time and installation cost by opting for a net fit seam installation. You can find more information on our website: www.forbo-flooring.co.uk/netfit

Marmoleum does not shrink over time when properly installed. That means welding, in the majority of cases,

is not required. Skilled installers can make perfect joints without using welding rod.

In those cases where welding is still required due to local regulations or as a preference, there are matching welding rods available for every Marmoleum design. The best matching welding rod has been selected in either uni or multi coloured structure.

The new Marmoweld provides a best in class welding rod solution for cleanability.

FINISHING TOUCH

When areas demand hygienic and watertight floor to wall installation, coving offers an elegant solution that can be handmade with the help of a cove forming strip. The Forbo range of pre-formed Marmoform coving and inner- and outer-corners are an ideal alternative. The strong pre-formed coving is easy to install and when welded to the linoleum floor creates a smooth transition that eliminates dirt traps.

Skirtings provide a functional as well as attractive junction between floor and wall. For all Marmoleum colours, a matching wall skirting provides a finishing touch to any installation.



THE DYNAMICS OF A BUILDING

There is an increase in demand for transitional environments; spaces need to be able to evolve and adapt to new functions. These constantly changing spaces require walls and floors that can perform as a chameleon, with timeless colours and materials.

These trends and changing mindsets inspired the Forbo Design team to analyse the different dynamics taking place within a building. Five themes were identified; receiving, moving, connecting, concentrating and recharging, with each one referring to the different identities a space can have. They express a certain state of a person or an activity taking place within the building.





RECEIVING

The theme 'receiving' describes the scenario of a person entering a building; making a transition from the outdoors to the indoors. A space where one should feel welcome and which is accessible and transparent as first impressions are key. This is the area of the building that should clearly represent the 'feel' of the brand and meet the expectations of the client to make them feel comfortable and at home.

MOVING

'Moving' represents the action towards the destination and the purpose of why someone is in a building. Orientation is priority, so these areas need to be clear to read and offer guidance even when one is stressed. The space needs to be legible and aid with wayfinding

CONNECTING

The dynamics of a 'connecting' space signifies areas where you will connect with other people within a building, such as open public spaces for spontaneous interactions or semi open spaces for dialogues or brainstorms. These areas allow for an extrovert energy boost or to give the brain time out.

CONCENTRATING

For 'concentrating', the attention is on the individual and avoiding unwelcome distractions. These are secluded spaces for privacy and focus, and while concentrating, people need a muted ambiance. Therefore, colour palettes in this area of a building should be subtle and quiet.

RECHARGING

'Recharging' is connected to mindfulness and describes relaxed environments where people can let down their guard and be themselves. This area of the building should reflect a home-like setting, to allow people to refresh and recharge. Light and fresh shades should be used here, encouraging people to take a break, breathe and escape.

HOW CAN WE HELP YOU?

We have outlined all the benefits of choosing a Marmoleum floor for your project. If you need more details, feel free to utilise our range of tools or reach out to us directly.

More information about Marmoleum

Read the full Marmoleum story on our website. www.forbo-flooring.co.uk/marmoleum

Floor visualiser

To visualise the floor you have in mind in a specific room or even your own project, please go to our floor visualiser and play around with designs and images. www.forbo-flooring.co.uk/floorvisualiser

Sample service

Would you like to receive a sample, please go to our website or call 0800 731 2369

Installation, cleaning & maintenance

On our website you will find videos, PDF downloads and more to help you find the best way to install Marmoleum or to learn how you clean and maintain your floor. Our technical teams are just a phonecall away should you still have questions. www.forbo-flooring.co.uk/marmoleumfloorcare

Inspiration & references

To see how others apply Marmoleum, then please have a look at the 'Inspiration & references' part of our website. www.forbo-flooring.co.uk/references


BIM files

Should you want to integrate the floors in your own technical drawings we have BIM data for all our products. www.forbo-flooring.co.uk/BIM



Protect your floor

One of the recommended elements to keep you floor looking better for longer is the use of a good entrance system, such as our Coral and Nuway barrier matting solutions. www.forbo-flooring.co.uk/entranceflooring



Contact

Should you have remaining questions, please don't hesitate to contact us via; www.forbo-flooring.co.uk/contact or send an email to info.flooring.uk@forbo.com

5.

Collection overview Marmoleum Solid

Colour number	Colour name	Structure	Thickness 2.0 mm	Thickness 2.5 mm	Decibel 18dB 3.5 mm*	Marmoleum Modular	Marmoleum Click	Welding rod	LRV value	NCS code
3580	milk chocolate	Cocoa		•				UNI	20%	NCS S 6005-Y50R
3582	earl grey chocolate	Cocoa		•				UNI	33%	NCS S 3502-B
3583	chocolate blues	Cocoa		•				UNI	9%	NCS S 7005-R80B
3584	white chocolate	Cocoa		•				UNI	60%	NCS S 2010-Y
				•	-			UNI	47%	
3585	stracciatella	Cocoa		_	-					NCS S 2010-G60Y
3586	indigo milk	Сосоа		•				UNI	23%	NCS S 4010-R90B
3587	curcuma	Cocoa		•				UNI	34%	NCS S 3030-Y10R
3588	eucalyptus	Cocoa		•				UNI	31%	NCS S 3005-G50Y
3589	nori	Cocoa		•				UNI	25%	NCS S 5000-N
	+			•						
3590	meringue	Cocoa		_				UNI	51%	NCS S 2005-Y40R
3591	black tea	Cocoa		•				UNI	9%	NCS S 8000-N
3592	salted caramel	Cocoa		•				UNI	32%	NCS S 3020-Y40R
3593	matcha	Cocoa		•				UNI	31%	NCS S 4010-G70Y
3594	chia seeds	Cocoa		•				UNI	27%	NCS S 5000-N
	+				-					
3595	panna cotta	Cocoa		•				UNI	28%	NCS S 5005-Y20R
3596	hummus	Cocoa		•				UNI	41%	NCS S 3010-G90Y
3568	delta lace	Concrete				•	•		13%	NCS S 7005-Y20R
3701	moon	Concrete					•		61%	NCS S 1510-G90Y
3702	liquid clay		•	•	•	•	•	UNI	23%	NCS S 5005-Y20R
	+'	Concrete			_		_			
3703	comet	Concrete		•				UNI	14%	NCS S 6502-G
3704	satellite	Concrete	<u></u>	•	<u> </u>	•		UNI	23%	NCS S 5502-Y
3705	meteorite	Concrete		•	•			UNI	16%	NCS S 6502-Y
3706	beton	Concrete		•	_			UNI	28%	NCS S 5005-G80Y
				_		_	_	UNI		
3707	black hole	Concrete				•	•		7%	NCS S 8500-N
3708	fossil	Concrete		•				UNI	34%	NCS S 4005-Y20R
3709	silt	Concrete		•				UNI	22%	NCS S 5010-Y10R
3711	cloudy sand	Concrete			1	•	•		49%	NCS S 2010-Y
3712	orange shimmer			•		_	_	UNI	31%	NCS S 4502-Y/1050-Y5
		Concrete		_				UNI		
3716	Mercury	Concrete			1	•			50%	NCS S 1502-Y
3717	Neptune	Concrete				•			38%	NCS S 2502-Y
3718	Pluto	Concrete				•	l		30%	NCS S 3502-Y
3722	stardust	Concrete				•			59%	NCS S 1010-G80Y
			•	•	•	_	•	UNI		
3723	nebula	Concrete		_				UNI	17%	NCS S 6500-N
3724	orbit	Concrete	•	•	•		•	UNI	37%	NCS S 3502-Y
3725	cosmos	Concrete		•				UNI	9%	NCS S 7502-B
3727	drift	Concrete		•				UNI	31%	NCS S 4010-Y10R
3732				•				UNI	45%	NCS S 3005-G20Y
	asteroid	Concrete		_						
3733	yellow shimmer	Concrete		•				UNI	42%	NCS S 3010-G60Y
3736	green shimmer	Concrete		•				UNI	32%	NCS S 4005-G50Y
3745	Cornish grey	Concrete				•		UNI	15%	NCS S 6502-G
3749	Arctic	Concrete		•				UNI	60%	NCS S 1540-G40Y
3750	pine forest	Concrete		•				UNI	31%	NCS S 4010-G10Y
3751	tundra	Concrete		•	•			UNI	24%	NCS S 5010-G30Y
3752	taiga	Concrete		•				UNI	16%	NCS S 6010-B70G
3753	blue ice	Concrete		•				UNI	30%	NCS S 4010-B10G
				•	+			UNI		
3754	Sirius	Concrete							12%	NCS S 6020-B10G
3755	glacier	Concrete		•				UNI	33%	NCS S 4005-G20Y
3756	Neptune	Concrete		•				UNI	18%	NCS S 6005-B80G
3757	Pluto	Concrete		•				UNI	51%	NCS S 2010-G70Y
3758	shale	Concrete						UNI	41%	NCS S 3010-G90Y
3759	Mercury	Concrete		•				UNI	28%	NCS S 5005-Y20R
3760	dust	Concrete		•	•			UNI	38%	NCS S 3005-Y
3761	Titan	Concrete		•				UNI	41%	NCS S 3010-Y
3762	loam	Concrete		•				UNI	20%	NCS S 6005-G80Y
3763	blue shimmer	Concrete		•	1			UNI	29%	NCS S 4005-G
3323	black	Walton		•				UNI	4%	NCS S 9000-N
3352	Berlin red	Walton		•		•	l	UNI	10%	NCS S 4050-Y80R
3353	eggplant purple	Walton		•	1			UNI	8%	NCS S 8005-Y80R
					+	•				
3354	pumpkin yellow	Walton			-	_	_	UNI	31%	NCS S 2050-Y30R
3355	rosemary green	Walton		•	•		•	UNI	21%	NCS S 5010-G70Y
3358	petrol	Walton		•		•	•	UNI	9%	NCS S 7020-B10G
3359	bottle green	Walton		•				UNI	7%	NCS S 8010-G30Y
3360	vintage blue	Walton		•			•	UNI	29%	NCS S 3020-B
				_			_	UNI		
3362	yellow moss	Walton			1	•			30%	NCS S 3040-G90Y
3363	lilac	Walton					•		38%	NCS S 3005-R50B
3367	alloy	Walton		•				UNI	25%	NCS S 5500-N
3369	titanium	Walton		•				UNI	48%	NCS S 2502-Y
		Walton		•	+			UNI		
3370	terracotta				-				18%	NCS S 5030-Y40R
3371	cement	Walton		•	1			UNI	30%	NCS S 4502-Y
3374	cobalt grey	Walton		•				UNI	7%	NCS S 8005-B20G
3375	grey adobe	Walton		•				UNI	17%	NCS S 6502-Y
3376	peat	Walton		•				UNI	11%	NCS S 7502-Y
					+					
3377	North Sea blue	Walton		•	1			UNI	18%	NCS S 6010-B10G
3378	stucco	Walton	<u></u>	•	<u> </u>			UNI	43%	NCS S 3005-Y20R
3601	warm grey	Piano		•				UNI	32%	NCS S 3005-G50Y
				•	+					
3607	grey dusk	Piano			-			UNI	11%	NCS S 7500-N
3629	frosty grey	Piano		•				UNI	49%	NCS S 2005-G50Y
3630	angora	Piano		•				UNI	37%	NCS S 4010-Y10R
3631	otter	Piano		•	1			UNI	20%	NCS S 6005-Y20R
				_	+					
3634	meadow	Piano		•	-			UNI	43%	NCS S 2030-G80Y
3642	periwinkle	Piano		•				UNI	24%	NCS S 4020-B
3012		Piano		•				UNI	15%	NCS S 4040-B
	Neptune bille									
3645 3647	Neptune blue nettle green	Piano		•				UNI	24%	NCS S 3040-G20Y

^{*} All colours can be made as a 18dB Decibel construction. This Marmoleum variant is available on request and minimum order quantities and lead times apply. Please contact your local sales manager for more information. The highlighted items are available from stock.

Collection overview Marmoleum Marbled

Colour number	Colour name	Structure	Thickness 2.0 mm	Thickness 2.5 mm	Thickness 3.2 mm	Acoustic 14dB 4.0 mm	Decibel 18dB 3.5 mm*	Ohmex	Authentic stock until the end of 2028	Marmo- leum Modular	Marmole- um Click	Welding rod	LRV value	NCS code
2499	sand	Real	•	•								MC	56%	NCS S 1510-Y20R
2621	dove grey	Real		•			•					MC	36%	NCS S 3005-G50Y
2629	eiger	Real	•	•								MC	19%	NCS S 6005-G80Y
2707	barley	Real								•			49%	NCS S 1515-Y30R
2713	calico	Real		•						•		MC	53%	NCS S 2010-Y20R
2767	rust	Real	_	•					_			MC	19%	NCS S 4040-Y50R
2939	black	Fresco	•	•				•	•			MC	5%	NCS S 9000-N
3030	blue	Real	•	•			•		•	•		MC	12%	NCS S 5030-R90B
3032	mist grey Caribbean	Real Real	•	•	•	•	•	•	•			MC MC	42% 55%	NCS S 3005-G80Y NCS S 1515-Y20R
3038 3048	graphite	Real	•	•	•	•	•	•	•	•		MC	14%	NCS S 7502-Y
3053	dove blue	Real	•	•	_	_	•	_		•		MC	27%	NCS S 4005-B80G
3055	fresco blue	Real	•	•	•	•	_	•	•	_		MC	23%	NCS S 4020-B
3075	shell	Real	•	•	•				•			MC	44%	NCS S 2020-Y20R
3120	rosato	Real		•	_		•		_	•		MC	51%	NCS S 2010-Y20R
3123	arabesque	Real		•								MC	23%	NCS S 5000-N
3125	golden sunset	Fresco	•	•								UNI	38%	NCS S 1070-Y20R
3126	Kyoto	Fresco		•								UNI	18%	NCS S 2570-Y60R
3127	Bleeckerstreet	Real	•	•					•			MC	9%	NCS S 2570-R
3131	scarlet	Fresco		•						•	•	MC	13%	NCS S 1580-Y90R
3136	concrete	Real	•	•			•		•	•		MC	47%	NCS S 3005-G80Y
3137	slate grey	Real		•								MC	16%	NCS S 6502-Y
3139	lava	Fresco	•	•	•	•			•			UNI	9%	NCS S 8000-N
3141	Himalaya	Real		•					•			MC	40%	NCS S 3020-Y10R
3146	serene grey	Real	•	•	•		•	•	•	•		MC	27%	NCS S 4502-Y
3173	Van Gogh	Real	•	•					•			MC	46%	NCS S 2030-Y20R
3174	Sahara	Real	•	•								MC	29%	NCS S 3040-Y30R
3203	henna	Fresco		•					•			UNI	11%	NCS S 5040-Y80R
3209	raven	Real									•		5%	NCS S 9000-N
3216	moraine	Real								•			34%	NCS S 4005-G80Y
3219	spa	Real		•								MC	32%	NCS S 3020-B30G
3224	chartreuse	Real	•	•			•		•			MC	38%	NCS S 2050-G60Y
3225	dandelion	Real		•			•		•			MC	46%	NCS S 2050-Y10R
3232	horse roan	Real		•						•		MC	40%	NCS S 3010-Y20R
3233	shitake	Real		•								MC	23%	NCS S 4020-Y30R
3234	forest ground	Real		•								MC MC	33% 7%	NCS S 4010-Y10R
3236 3238	dark bistre laguna	Real Real		_						•	•	IVIC	30%	NCS S 8502-Y NCS S 2040-B10G
3246	shrike	Fresco		•			•			_	_	UNI	21%	NCS S 6005-Y20R
3247	green	Fresco		•			_					MC	23%	NCS S 4050-G50Y
3251	lemon zest	Fresco	•	•						•	•	MC	52%	NCS S 1050-Y10R
3252	sparrow	Fresco	•	•	•	•	•		•	_	_	UNI	29%	NCS S 4010-Y10R
3254	clay	Fresco	•	•								UNI	17%	NCS S 6010-Y30R
3257	edelweiss	Fresco		•								UNI	58%	NCS S 2005-G80Y
3259	mustard	Fresco		•								UNI	38%	NCS S 3040-Y
3260	leaf	Fresco		•								UNI	27%	NCS S 3030-G40Y
3261	marine	Fresco		•								UNI	8%	NCS S 6030-B
3262	marigold	Fresco		•								UNI	34%	NCS S 1070-Y40R
3263	rose	Fresco		•								UNI	17%	NCS S 2060-Y90R
3264	Greek blue	Fresco		•								UNI	17%	NCS S 3050-B
3265	avocado	Fresco		•								UNI	31%	NCS S 3030-G60Y
3266	lilac	Fresco		•								UNI	37%	NCS S 3005-R20B
3267	aqua	Fresco		•								UNI	39%	NCS S 2030-B50G
3268	honey suckle	Real		•								MC	33%	NCS S 2040-R
3269	turquoise	Fresco		•								UNI	28%	NCS S 3040-B50G
3270	violet	Real		•								MC	17%	NCS S 5020-R70B
3271	hunter green	Fresco		•								UNI	13%	NCS S 5030-B90G
3272	plum	Real		•								MC	13%	NCS S 6020-R10B
3273	ruby	Fresco		•								UNI	10%	NCS S 4050-R
3403	Asian tiger	Vivace		•								MC	29%	NCS S 3040-Y30R
3405	Granada	Vivace		•						•		MC	28%	NCS S 5005-Y20R
3407	donkey island	Vivace		•						•		MC	36%	NCS S 3010-Y30R
3411 3413	sunny day green melody	Vivace Vivace		•								MC MC	45% 34%	NCS S 2030-Y20R NCS S 3030-G60Y

^{*} All colours can be made as a 18dB Decibel construction. This Marmoleum variant is available on request and minimum order quantities and lead times apply. Please contact your local sales manager for more information. The highlighted items are available from stock.

Collection overview Marmoleum Marbled

Colour number	Colour name	Structure	Thickness 2.0 mm	Thickness 2.5 mm	Thickness 3.2 mm	Acoustic 14dB 4.0 mm	Decibel 18dB 3.5 mm*	Ohmex	Authentic stock until the end of 2028	Marmo- leum Modular	Marmole- um Click	Welding rod	LRV value	NCS code
3421	oyster mountain	Vivace		•								MC	17%	NCS S 6502-Y
3426	cork tree	Vivace		•								MC	16%	NCS S 6010-Y10R
3427	agate	Vivace		•								MC	39%	NCS S 3010-Y10R
3428	seashell	Splash		•								MC	45%	NCS S 3005-G80Y
3429	bluemoon	Splash		•								MC	45%	NCS S 3010-G20Y
3430	salsa verde	Splash		•								MC	47%	NCS S 3010-G50Y
3431	limoncello	Splash		•								MC	48%	NCS S 2010-G60Y
3432	fruit punch	Splash		•								MC	46%	NCS S 3010-G90Y
3433	rockpool	Splash		•								MC	46%	NCS S 3010-G80Y
3825	African desert	Fresco		•								UNI	26%	NCS S 2050-Y50R
3828	blue heaven	Fresco	•	•					•			UNI	34%	NCS S 3020-B10G
3846	natural corn	Fresco	•	•					•			UNI	56%	NCS S 1030-Y10R
3847	golden saffron	Real	•	•								MC	41%	NCS S 2040-Y30R
3858	Barbados	Fresco	•	•					•		•	UNI	65%	NCS S 1510-Y10R
3860	silver shadow	Fresco	•	•			•		•		•	UNI	48%	NCS S 2005-G70Y
3861	Arabian pearl	Fresco	•	•								UNI	50%	NCS S 2010-Y20R
3866	eternity	Fresco	•	•			•		•		•	UNI	21%	NCS S 5502-G
3872	volcanic ash	Fresco		•			•				•	UNI	10%	NCS S 7500-N
3874	walnut	Fresco		•								UNI	11%	NCS S 7010-Y50R
3881	green wellness	Real	•	•								UNI	51%	NCS S 2020-G90Y
3883	moonstone	Fresco		•			•					UNI	45%	NCS S 2502-G
3885	spring buds	Fresco		•							•	UNI	46%	NCS S 2040-G60Y
3889	cinder	Fresco		•			•					UNI	30%	NCS S 3502-Y
3890	oat	Fresco		•								UNI	31%	NCS S 3010-Y20R
3891	sage	Fresco		•								UNI	31%	NCS S 4010-G30Y
5801	river bank	Terra		•								MC	29%	NCS S 4010-G70Y
5802	alpine mist	Terra		•								MC	31%	NCS S 3005-G50Y
5803	weathered sand	Terra		•								MC	31%	NCS S 4010-Y10R
5804	pink granite	Terra		•								MC	27%	NCS S 4010-Y30R

Collection overview Marmoleum linear

Colour number	Colour name	Structure	Thickness 2.5 mm	Decibel 18dB 3.5 mm*	Marmoleum Modular	Marmoleum Click	Welding rod	LRV value	NCS code
3573	trace of nature	Linear	•		•	•	UNI	28%	NCS S 4005-Y20R
3575	white cliffs	Linear			•			57%	NCS S 2010Y
5216	Pacific beaches	Linear				•		48%	NCS S 2020-Y20R
5217	withered prairie	Linear	•		•	•	UNI	25%	NCS S 5010-Y30R
5218	Welsh moor	Linear	•		•		UNI	8%	NCS S 8005-Y80R
5225	compressed time	Linear	•		•		UNI	34%	NCS S 4010-Y30R
5226	grey granite	Linear			•			29%	NCS S 5005-G50Y
5230	white wash	Linear			•			49%	NCS S 2010-Y30R
5231	Cliffs of Moher	Linear	•		•		UNI	18%	NCS S 6005-Y20R
5232	rocky ice	Linear	•		•		UNI	47%	NCS S 2005-Y20R
5235	North sea coast	Linear			•			32%	NCS S 4010-Y30R
5237	black sheep	Linear			•			18%	NCS S 6502-B
5248	urban silver	Linear	•				UNI	41%	NCS S 3005-Y20R
5249	Stonehenge	Linear	•				UNI	33%	NCS S 3502-Y
5250	blue basalt	Linear	•				UNI	27%	NCS S 5005-Y20R
5251	black glacier	Linear	•				UNI	19%	NCS S 5502-Y
5252	ivory shades	Linear	•				UNI	52%	NCS S 2005-Y10R
5253	bleached gold	Linear	•				UNI	42%	NCS S 3010-Y20R
5254	red horse	Linear	•				UNI	18%	NCS S 6010-Y50R
5255	desert sand	Linear	•				UNI	48%	NCS S 2010-Y20R
5256	silt stone	Linear	•				UNI	44%	NCS S 3010-Y30R
5257	sandy chalk	Linear	•				UNI	61%	NCS S 1505-Y

marmoleum[®]

noleum meets the requirements of EN-ISO 24011 | Marmoleum Acoustic meets the requirements of EN 687 | Marmoleum Decibel meets the requirements of EN 686

			Marmoleum Solid 2.5 mm	Marmoleum Real/Fresco/Concre- te 2.0 mm	Marmoleum Marbled 2.5 mm	Marmoleum Linear 2.5 mm	Marmoleum Marbled 3.2 mm	Marmoleum Decibel	Marmoleum Acoustic
Ť	Total thickness	EN-ISO 24346	2.5 mm	2.0 mm	2.5 mm	2.5 mm	3.2 mm	3.5 mm	4.0 mm
5	Surface finish		Topshield pro	Topshield pro	Topshield pro	Topshield pro	Topshield pro	Topshield pro	Topshield pro
	Domestic use	EN-ISO 10874	Class 23	Class 23	Class 23	Class 23	Class 23	Class 23	Class 23
	Commercial use	EN-ISO 10874	Class 34	Class 32	Class 34	Class 34	Class 34	Class 33	Class 33
<u>"</u>	Light Industrial use	EN-ISO 10874	Class 43	Class 41	Class 43	Class 43	Class 43	Class 41	Class 41
<u></u> → F	Roll width	EN-ISO 24341	2.0 m	2.0 m	2.0 m	2.0 m	2.0 m	1.95 / 2.0 m	2.0 m
\$}} F	Roll length	EN-ISO 24341	≤ 33 m ¹	≤ 33 m ¹	≤ 33 m ¹	\leq 33 m 1	≤ 33 m ¹	≤ 33 m ¹	≤ 33 m ¹
ු 1	Total weight	EN-ISO 23997	2900 g/m ²	2300 g/m ²	2900 g/m ²	2900 g/m ²	3900 g/m ²	3100 g/m ²	4000 g/m ²
	Residual indentation Typical value	EN-ISO 24343-1	≤ 0.15 mm ~0.08 mm	≤ 0.15 mm ~0.07 mm	≤ 0.15 mm ~0.08 mm	≤ 0.15 mm ~0.08 mm	≤ 0.15 mm ~0.10 mm	≤ 0.30 mm ~0.20 mm	≤ 0.40 mm ~0.25 mm
	Castor chair continuous use	ISO 4918	Pass	Pass	Pass	Pass	Pass	Pass	Pass
77	Colour fastness to light	EN-ISO 105-B02 method 3	≥ 6	≥6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6
2 2	Flexibility	EN-ISO 24344	ø 40 mm	ø 30 mm	ø 40 mm	ø 40 mm	ø 50 mm	ø 40 mm	ø 60 mm
Ð F	Resistance to chemicals	EN-ISO 26987	Re	esistant to diluted acids	, oils, fats and to the c	onventional solvents.	Not resistant to prolo	nged exposure to alk	alis.
7	Bacteriostatic properties*		Marmoleur	n has natural bacteriost	tatic properties which	are confirmed by ind	ependent laboratories	s, even against the ba	cteria MRSA.
	Cigarette resistance	EN 1399	There is	no melting of the surfac	ce by cigarettes. Mark	s left on Marmoleum	as a result of stubbed-	out cigarettes can be	removed.
§ 9	Slip resistance (ramp test)	DIN 51130	R9	R9	R9	R9	R9	R9	R9
	Acoustical impact noise reduction	EN-ISO 717-2	≤ 5 dB	≤ 4 dB	≤ 5 dB	≤ 5 dB	≤ 6 dB	≤ 18 dB	≤ 14 dB
	Indoor Air Emissions: TVOC at 28 days	EN 16516	≤ 0,01 mg/m³	≤ 0,01 mg/m³	≤ 0,01 mg/m³	≤ 0,01 mg/m³	≤ 0,01 mg/m³	≤ 0,05 mg/m³	≤ 0,05 mg/m
N	Marmoleum Ohmex 2.5 mi	n		Electrical resistan	ce 1 x 10 ⁶ Ω < R1 < 1	c 10° Ω (static dissipat	ive) tested in accordar	nce with EN 1081	
80	Creating better environm	ients					ne lowest environmen positive cradle to gate		
1	Natural materials						ıral ingredients (e.g. lir ains PEFC certified wo		
_						PVC, PET, synthetic ru			
3 F	Recycled content				nd post-consumer stre	eams of both flooring	and non-flooring Mar	moleum products.	
-						· · · · · · · · · · · · · · · · · · ·	mer used flooring are		
, -	Health and safety			M	armoleum is REACH o	ompliant to assure hu	ıman safety and healtl	h.	
1	Renewable eletricity			Marmo	oleum is manufacture	d using 100% electric	ity from renewable so	urces.	
_ (Green building certification	ns	Application	of Marmoleum sheet o	an help maximise co	ntribution in green bu	ilding certifications e.	g. LEED, BREEAM, DG	NB and WELL.
	Application on underfloor	heating	yes	yes	yes	yes	yes	yes	yes
1	Marmoleum meets the req	uirements of EN 14	1041: 2004						
: 6	Product code	EN 14041	0100201-DoP-107	0100201-DoP-107	0100201-DoP-107	0100201-DoP-107	0100201-DoP-107	0100207-DoP-107	0100206-DoP-1
€ F	Reaction to fire	EN 13501-1	C _{fl} -s1, G, CS***	C _{fl} -s1, G, CS	C _{fl} -s1, G, CS***	C _{fl} -s1, G, CS***	C _{fl} -s1, G, CS	C _{fl} -s1, G, NCS	C _{fl} -s1, G, CS
<u>-</u>	Slip resistance	EN 13893	μ≥ 0.30	µ ≥ 0.30	μ ≥ 0.30	μ ≥ 0.30	μ≥ 0.30	μ≥ 0.30	μ ≥ 0.30
90									
- جھ	Body voltage	EN 1815	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV

^{*} All colours can be made as a 18dB Decibel construction. This Marmoleum variant is available on request and minimum order quantities and lead times apply. Please contact your local sales manager for more information. The highlighted items are available from stock.

^{*} Marmoleum sheet can be installed Net Fit, or with a welding rod in the seam. Both are proven hygienic solutions.

** For details, please consult the EPD for Marmoleum 4790690881.101.1

*** Marmoleum 2.5 mm is available in reaction to fire classification B_{it}-s1, G, CS. Available on request, contact sales support for leadtime.

marmoleum® modular

Marmoleum Modular meets the requirements of EN-ISO 24011

			Marmoleum Modular lines, shade, marble and colour	Marmoleum Modular textura and slate
	Total thickness	EN-ISO 24346	2.5 mm	2.5 mm
ı ji	Domestic: heavy	EN-ISO 10874	Class 23	Class 23
	Commercial: very heavy	EN-ISO 10874	Class 34	Class 34
ı ji	Light industrial: heavy	EN-ISO 10874	Class 43	Class 43
	Dimensions (length x width)	EN-ISO 24342	50 x 25 cm / 50 x 50 cm / 100 x 25 cm	50 x 25 cm / 50 x 50 cm / 100 x 25 cm
K N	Squareness and straightness	EN-ISO 24342	≤ 0.35 mm	≤ 0.35 mm
	Residual indentation Typical value	EN-ISO 24343-1	≤ 0.15 mm ~ 0.05	≤ 0.15 mm ~ 0.05
	Castor chair continuous use	EN 425 / ISO 4918	Pa	ass
R	Colour fastness to light	EN-ISO 105-B02 method 3	≥	6
	Resistance to chemicals	EN-ISO 26987	Resistant to diluted acids, oils, fats and to conventional	solvents. Not resistant to prolonged exposure to alkalis.
9	Bacteriostatic properties			which are confirmed by independent laboratories, e bacteria MRSA.
	Cigarette resistance	EN 1399	Marks left on linoleum as a result of st	ubbed-out cigarettes can be removed.
	Slip resistance (ramp test)	EN 16165 Annex B	R9	R10
٩	Acoustical impact sound reduction	EN ISO 717-2	≤ 5 dB	≤ 5 dB
LCA	Life Cycle Assessment		LCA is the foundation for securing	the lowest environmental impact.
	Creating better environments			
\prec	renewable electricity		Marmoleum is manufactured using 10	10% electricity from renewable sources.
	natural materials (e.g. linseed oil, rosin, wood flour, limestone)		Marmoleum contains Pi	EFC certified wood flour.
	recycled content		Marmoleum contai	ns recycled content.
	Application on underfloor heating		yes	yes
	Marmoleum meets the requirements of	FEN 14041: 2004		
(€	Product code	EN 14041: 2004	0100201-DoP-101	0100201-DoP-101
G CS	Reaction to fire	EN 13501-1	C _{fl} -s1, G, CS	C _n -s1, G, CS
°975 20,30	Slip resistance	EN 13893	μ≥ 0.30	µ ≥ 0.30
% 20 k	Body voltage	EN 1815	≤ 2.0 kV	≤ 2.0 kV
⁶ λ ₂₃	Thermal conductivity	EN-ISO 10456	0.17 W/m·K	0.17 W/m·K
	Indoor Air Emissions: TVOC at 28 days	EN 16516	≤ 0,01 mg/m³	≤ 0,01 mg/m³
_				

furniture linoleum

Ŷ	Total thickness	EN-ISO 24346	2.0 mm
<u> </u>	Roll width	EN-ISO 24341	1.83 m
	Roll length	EN-ISO 24341	≤ 30 m
	Weight	EN-ISO 23997	2100 g/m ²
	Residual indentation	EN-ISO 24341-1	≤ 0.20 mm
3	Colour fastness to light	EN ISO 105-B02 method 3	≥ 6
	Gloss level	ISO 2813	<5
5	Flexibility	EN-ISO 24344	ø 50 mm
${}^{\hspace{-0.1cm} \bullet\hspace{-0.1cm} \bullet}$	Resistance to chemicals	EN-ISO 26987	Resistant to diluted acids, oils, fats and to the conventional solvents. Not resistant to prolonged exposure to alkalis.
333	Heat resistance		70°C
B	Antistatic	EN 1815	≤ 0.20 kV
Ø.	CO ₂ neutral		Proven by type II environmental product declaration.
LCA	Life Cycle Assessment		LCA is the foundation for securing the lowest environmental impact.

bulletin board®

Total thickness	EN-ISO 24346	6.0 mm
Roll width	EN-ISO 24341	1.22 m (3 colours in 1.83 m)
Roll length	EN-ISO 24341	≤ 28 m
Total weight	EN-ISO 23997	4.700 g/m²
Flexibility	EN-ISO 24344	Ø 50 mm
Acoustical sound absorption	EN-ISO 354	0.10
Self-healing properties	LH000420	yes
Force on pins - Perpendicular to pin direct	LH000421	25 N (typical)
Force on pins - Perpendicular to pin at 7 mm	LH000421	10 N (typical)
Force on pins - Parallel to pin (pulling the pin out)	LH000421	15 N (typical)
Bacteriostatic properties	EN-ISO 22196	Marmoleum has natural bacteriostatic properties which are confirmed by independent laboratories, even against the bacteria MRSA.
Resistance to chemicals	EN-ISO 26987	Resistant to diluted acids, oils, fats and to the conventional solvents. Not resistant to prolonged exposure to alkalis.
Anti-static		yes
Gloss		Only available in matt colours: low reflection of sunlight or artificial light.



Forbo Flooring Systems is part of the Forbo Group, a global leader in flooring and movement systems, and offers a full range of flooring products for both commercial and residential markets. High quality linoleum, vinyl, textile, flocked and entrance flooring products combine functionality, colour and design, offering you total flooring solutions for any environment.

Forbo Flooring UK Limited High Holborn Road Ripley, Derbyshire DE5 3NT London EC1 showroom 79 St John Street, Clerkenwell London EC1M 4NR Tel: 0207 553 9300

For commercial enquiries

If calling from the North, London & South East Tel: 0800 0282 162 If calling from Scotland, Midlands & South West Tel: 0800 0935 258

Nuway enquiries:

Tel: 01773 740 688 Residential enquiries: Tel: 0800 0935 846 E-mail: info.flooring.uk@forbo.com www.forbo-flooring.co.uk

Ireland

Forbo Ireland Ltd 2 Deansgrange Business Park Blackrock Co Dublin Tel: 00353 1 2898 898 Email: info.ireland@forbo.com www.forbo-flooring.ie

Registered office:

Forbo Flooring UK Limited High Holborn Road, Ripley Derbyshire DE5 3NT Registered in England 9200318

Samples: Tel. 0800 731 2369 samples.uk@forbo.com

Find us on









Whilst Forbo Flooring UK Limited does its best to ensure that the contents of this samplebook are correct and accurate at the time of publication, to the fullest extent permitted by law, Forbo Flooring UK Limited makes no, and expressly disclaims all, guarantees of any kind, expressed or implied in respect of the information, content, materials or products displayed in this samplebook and does not represent that the information is accurate, complete or current and you are advised to visit our website at **www.forbo-flooring.co.uk** for up-to-date details or corrections to such contents.

